arXiv:1208.5141v1 [math.AP] 25 Aug 2012

A Continuous-time Link-based Kinematic Wave Model for Dynamic Traffic Networks

Ke Han[a]* Benedetto Piccoli[b]† Terry L. Friesz[c]‡ Tao Yao[c]§

[a] *Department of Mathematics,*
Pennsylvania State University, PA 16802, USA
[b] *Department of Mathematics,*
Rutgers University, NJ 08102, USA
[c] *Department of Industrial and Manufacturing Engineering,*
Pennsylvania State University, PA 16803, USA

Abstract

This paper is concerned with an analytical model of traffic flow on networks consistent with the Lighthill-Whitham-Richards model [39, 47]. The model captures the formation, propagation and dissipation of physical queues as well as spillbacks on a network level. Similar models have been mainly studied either in discrete-time [12, 13, 51], or at the level of specific junctions [29, 30, 34]. In this paper, we take one major step towards an analytical framework for analyzing the network model from two approaches: (1) we derive a system of *differential algebraic equations* (DAEs) for the explicit representation of network dynamics. The DAE system is the continuous-time counterpart of the *link transmission model* proposed in [51]; (2) we conduct mathematical analysis of the continuous-time model and discuss solution existence, uniqueness as well as continuous dependence on initial/boundary conditions. The proposed work has a positive impact on analytical Dynamic Traffic Assignment models in that it not only provides theoretical guarantee for continuous-time models, it also brings insights to the analytical properties of discrete models such as the cell transmission model [12, 13] and the link transmission model [51].

1 Introduction

This paper focuses on the Lighthill-Witham-Richards model [39, 47] on a vehicular network. We model the traffic dynamics on a link level with the following first order hyperbolic *partial differential equation* (PDE) which describes the spatial-temporal evolution of density and flow:

$$\frac{\partial}{\partial t}\rho(t,\,x)+\frac{\partial}{\partial x}f\big(\rho(t,\,x)\big) \;=\; 0 \tag{1.1}$$

where $\rho(t,\,x)\,:\,[0,\,+\infty)\times[a,\,b]\to[0,\,\rho_j]$ denotes density, $f(\rho)\,:\,[0,\,\rho^{jam}]\to[0,\,C]$ denotes flow. ρ^{jam} is the jam density, corresponding to a bumper-to-bumper situation, C is the flow

---

*Corresponding author, e-mail: kxh323@psu.edu;
†e-mail: piccoli@camden.rutgers.edu;
‡e-mail: tfriesz@psu.edu;
§e-mail: tyy1@engr.psu.edu;

capacity. The function $f(\cdot)$ describes explicitly the density-flow relation and is referred to as the fundamental diagram.

Classical mathematical results on the first-order hyperbolic equations of the form (1.1) can be found in [3]. For a detailed discussion of numerical schemes of conservation laws, we refer the readers to [24, 38]. A well-known discrete version of the LWR model – the Cell Transmission Model (CTM) – was described in [12, 13]. The PDE-based models have been studied extensively also in the context of vehicular networks, with a selected list of references including [6, 7, 10, 12, 13, 16, 23, 26, 27, 29, 30, 34, 35, 36, 43, 48, 52].

1.1 Network models

The fluid-based models on networks turn out to be much more complicated and subtle than a single conservation law. The drivers' behavior around merging and diverging intersections will affect the boundary data on each link incident to that intersection in a highly nonlinear way [22]. Let us consider a network consisting of just one junction with m incoming links $I_1, \ldots, I_m$ and n outgoing links $I_{m+1}, \ldots, I_{m+n}$. The notion of a weak solution at this junction associated with the system of conservation laws [27] is analogous to the one for a single conservation law. That is, the densities on each link ρ_k, $k = 1, \ldots, m+n$ satisfy

$$\sum_{k=1}^{m+n} \int_0^{+\infty} \int_{a_k}^{b_k} \rho_k \frac{\partial \phi_k}{\partial t} + f_k(\rho_k) \frac{\partial \phi_k}{\partial x} \, dx \, dt \;=\; 0 \tag{1.2}$$

for all smooth ϕ_k with compact support in $(0,\, +\infty) \times (a_k,\, b_k)$, $k = 1, \ldots, m+n$, that are also smooth across the junction:

$$\phi_i(t\ b_i) \;=\; \phi_j(t,\, a_j), \quad \frac{\partial \phi_i}{\partial x}(t,\, b_i) \;=\; \frac{\partial \phi_j}{\partial x}(t,\, a_j), \quad \text{for all} \quad t$$

where $i = 1, \ldots, m, \;\; j = m+1, \ldots, m+n$. For any weak solution $\rho_k(t,\, \cdot)$, $k = 1, \ldots, m+n$ with bounded variations for each t, the Rankine-Hugoniot condition holds:

$$\sum_{i=1}^{m} f_i\big(\rho_i(t,\, b_i)\big) \;=\; \sum_{j=m+1}^{m+n} f_j\big(\rho_j(t,\, a_j)\big) \tag{1.3}$$

Notice that (1.3) describes the conservation of flow through junction. However, the solution at a junction remains largely underdetermined with (1.2) and (1.3). In order to isolate a unique solution, various entropy conditions were proposed and analyzed, see [10, 13, 27, 30, 43].

The analytical junction models are best analyzed using the Riemann problems. A Riemann problem at a junction is an initial value problem corresponding to an initial data that is constant on each link. The Riemann problem and its solution method, the Riemann Solver, are extremely helpful to construct and analyze junction models in continuous time. The Riemann Solver associates, to each set of Riemann initial conditions, a set of boundary conditions such that the solution at the junction is obtained by solving a set of initial/boundary value problems on each link connected by the junction. (see [16, 22] for an overview of the Riemann Solvers). Various Riemann Solvers for merge and diverge junctions associated with different rules or policies, have been derived in the literature [10, 13, 16, 27, 29, 30]. The Riemann Solver can be explained easily with the notion of demand-supply put forward in [34, 35, 36]. The demand (supply) for an incoming (outgoing) link is a function of the density $\rho(t,\, b_i-)$ $(\rho(t,\, a_j+))$, which measures the maximum flux that an incoming (outgoing) link can send (receive).

1.2 Analytical models

Despite the fast growing literature on junction models of various types, the analytical properties of the system of conservation laws coupled with junction models are less understood. Solution properties such as existence, uniqueness and continuous dependence on initial/boundary data have not yet been confirmed by discrete-time models. [48] found out that capturing realistic traffic dynamics, such as queue spillback, may violate the requirement on solution existence. In [49], it was shown that under congested conditions, route travel times obtained with the CTM may become discontinuous. In addition, analytical representation of traffic flow that adequately replicate traffic theoretic relationships and yield well-behaved mathematical formulations are currently unavailable [44].

The scope of this paper is the continuous-time fluid-based model on vehicular networks. We aim towards an analytical representation of the dynamics on the links and through the junctions, while providing theoretical guarantee of solution existence, uniqueness and continuous dependence on initial/boundary value conditions. Such topics are crucial to a well-defined and well-posed theory of fluid-based traffic flow models. They also serve as the very foundation of analytical *dynamic traffic assignment* (DTA) models such as *dynamic user equilibrium* (DUE) and *dynamic system optimum* (DSO). The DUE is formulated as either a variational inequality [19], or a nonlinear complementarity problem [25, 50] or as a differential variational inequality [20, 21]. The DSO problem is usually formulated in continuous-time, as an optimal control problem [18], or a variational inequality [46]. Solution existence of all the aforementioned formulations typically requires the continuity of the delay operator arising from the dynamic network loading sub-problem [19]. The continuous dependence on initial/boundary data of network solutions as we put forward in this paper plays a key role in showing continuity of the effective delay operator in a Hilbert space.

Our main technique for showing solution existence and continuous dependence is the use of a wave-front tracking algorithm and suitable approximations and functionals to control the total variation of the fluxes across the junction. The wave-front tracking algorithm is a basic technique for constructing solutions to system of conservation laws, based on piecewise affine flux function and piecewise constant initial/boundary datum. We refer the readers to [3] and [28] for a general theory of conservation laws and for a discussion of wave-front tracking algorithms. The main difficulty in constructing solutions to system of conservation laws via wave-front tracking arises from the control of total variation of the approximate solutions $\rho_\nu(\cdot,\,\cdot)$, $\nu \geq 1$. For a single conservation law, the total variation of the solution $\rho_\nu(t,\,\cdot)$ is decreasing with respect to time, and the number of wave interactions is finite, see [3]. While for systems of conservation laws which is the case of network flow models, the construction of wave-front tracking approximation is more subtle due to the interaction of waves on an link with junctions. In particular the bounds on number of waves, interactions and total variations are much more difficult to estimate. In [10], an example was shown where a single wave of arbitrarily small variation generates, after interacting with the junction, waves whose variations are bounded away from zero. Such arbitrarily large magnification of total variation is unique to conservation law systems. As a consequence, one could no longer expect any bound on the total variation of the solution in terms of the total variation of the initial data. In order to proceed, we need to define carefully the Riemann Solver we want to employ in the construction of a wave-front tracking solution.

Another contribution made in this paper is an analytical representation of the dynamics on a network-wide level. In general, the LWR-based models do not admit closed form solutions even for a single conservation law. Nevertheless, by assuming a triangular fundamental diagram and an initially empty network, we are able to implicitly solve the dynamics on each link given the boundary data using a variational argument. Such type of argument has been used for the analysis of traffic flows on a single (possibly inhomogeneous) link by Daganzo [14, 15] and Newell [42]. It has also been applied to traffic research extensively [4, 5, 8, 9, 43, 51]. In our formulation, we rely on the analysis of a *separating shock wave* on each link [6]. Given that the link is initially empty, the separating shock will be the unique shock wave on the link that separates the free flow phase and the congested phase. Depending on the left and right boundary conditions, the separating shock can reach and stay in the entrance or the exit of the link for some time period. When this happens, we call the separating shock a *latent shock*. The case where the separating shock reaches the entrance of a link is identified as *spillback* since the current link is dominated by congestion and as a result, the supply at the entrance is reduced, such reduction of supply poses further constraints on the junction solution and affects the upstream links. We propose an analytical way of detecting the latent shock based only on the cumulative arriving and departure curves at the two boundaries of the link. Finally, given appropriate Riemann Solver, the dynamics on a network level can be described explicitly as a system of *differential algebraic equations* (DAEs). The solution properties established in this paper will apply to such DAE system, as it is just a special case of what we will analyze using wave-front tracking algorithm in this paper.

We make an important note that the resulting DAE system is the continuous-time counterpart of the *link transmission model* (LTM), which was originally proposed as a numerical scheme in [51]. In this study, we do not attempt to develop new traffic flow models or computational methods. Rather, we intend to establish a solid theoretical background for the continuous-time traffic flow model, which is the foundation of analytical DTA models. The properties of continuous models established here will also provide insights on discrete-time models such as CTM and LTM. The analytical formulation of network dynamics as well as rigorous theoretical results reported in this paper constitute a major step towards a mathematically sound theory of network flows.

1.3 Organization

The rest of the paper is organized as follows. In Section 2, we will present an analytical framework for analyzing the continuous-time model on networks. In particular, we rely on a continuous variable indicating flow and a binary variable indicating the regime. The system can be greatly simplified by analyzing the separating shock [6] on each link, and their interactions through the junctions. Section 3 summarizes the discussion in Section 2 and present an explicit DAE system for describing and predicting the network dynamics, including spillback. The DAE system is the continuous-time counterpart of the Link Transmission Model [51]. Section 4 is devoted to establishing analytical properties of the resulting continuous-time system. The argument we use is generalizable to a system with any BV (bounded variation) initial and boundary conditions. In particular, we show solution existence, uniqueness and continuous dependence on initial/boundary data, in the case of two Riemann Solvers introduced in Section 2. In Section 5, we will present a numerical example of the model on a network. Note that we do not attempt to replicate the LTM algorithm in this numerical study. Rather, the point is to show the features of the proposed continuous-time model such as separating shock, latent shock as well as spillback.

2 Formulation of the Link-based Kinematic Wave Model on networks

In this section, we will present a continuous-time fluid-based model for a road network, assuming the triangular fundamental diagram. This model relies on a new set of state variables, and the dynamics on a link level can be inferred from the boundary conditions via Lax-Hopf formula [14, 15, 17, 32]. Note that the time-discretization of such system is precisely the *link transmission model* (LTM) proposed in [51]. Unlike the cell-based models [12, 13], the Link Transmission Model does not require explicit computations in the interior of the links, rather, it relies on the variational argument proposed by Newell [42] to determine the sending/receiving flows on a link level. The continuous-time formulation proposed in this paper complements the LTM and provides further insights of the LTM in the context of analytical models. In particular, we will establish properties of continuous-time solution to this system later in Section 4.

2.1 State variables of the system

Consider a link represented by an interval $[a,\, b]$, with $b - a = L > 0$. In the formulation of LKWM model, we will choose flow $q(t,\, x)$ and regime $r(t,\, x)$ as the state variables for the system. It is obvious from Figure 1 that a single value of q corresponds to two traffic states: 1) free flow phase ($r = 0$) and 2) congested phase ($r = 1$). Hence the pair $(q(t,\, x),\, r(t,\, x)) \in [0,\, C] \times \{0,\, 1\}$ determines a unique traffic state. The following map is then well-defined

$$\psi(\cdot) : [0,\, C] \times \{0,\, 1\} \;\rightarrow\; [0,\, \rho^{jam}], \qquad (q,\, r) \mapsto \rho \tag{2.4}$$

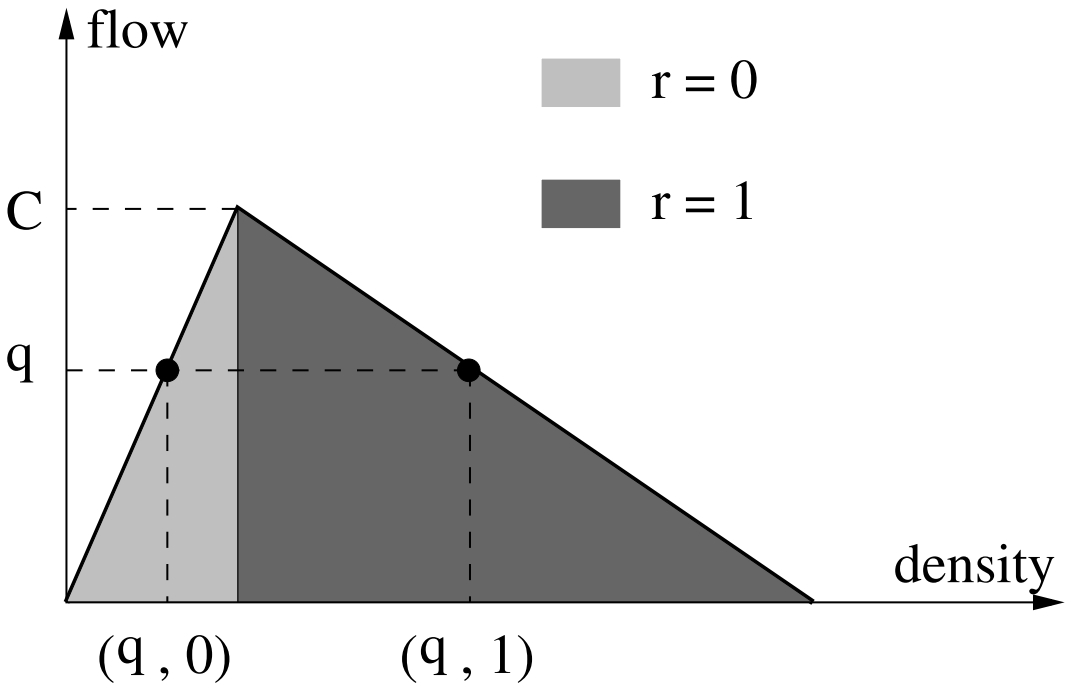

Figure 1: Illustration of the new state variable $(q,\, r)$.

2.2 Traffic flow through junctions

Various junctions models associated with the LWR model have been developed in different contexts. For instance, in one research line, [27] approached the junction model by invoking the concept of weak solution for a system of conservation laws across the junction, as well as the notion of entropy condition which amounts to maximizing a certain quantity over all admissible boundary fluxes. [10] solved a Riemann problem on a junction using the concept of Riemann Solver, i.e. a map associating, to each set of Riemann initial conditions, a set of boundary conditions such that the solution at the junction is obtained by solving initial/boundary value problems on each link connected to the junction. This approach was extended in subsequent papers, see [7, 16, 40].

In another research line, the junction model can be described less technically using the demand-supply functions [35, 36]. The demand function determines, based on the traffic conditions immediately upstream to the junction, how much traffic can leave the upstream links; while the supply function determines, based on the traffic conditions immediately downstream to the junction, how much traffic can enter the downstream links. Various rules and policies can be associated with the demand and supply functions to account for different modeling assumptions. A selected list of different merging and diverging models based on demand-supply functions include [13, 29, 30, 34, 43]

In this section, we will present the Riemann Solvers [10] for merging and diverging junctions of simple types. In order to obtain an analytical representation of the junction models, we consider only two types of junctions depicted in Figure 2. More complicated junctions can be decomposed into a set of these two basic ones by introducing virtual links. Similar techniques have been applied in [13]. The Riemann Solver proposed in [10] must satisfy the following assumptions.

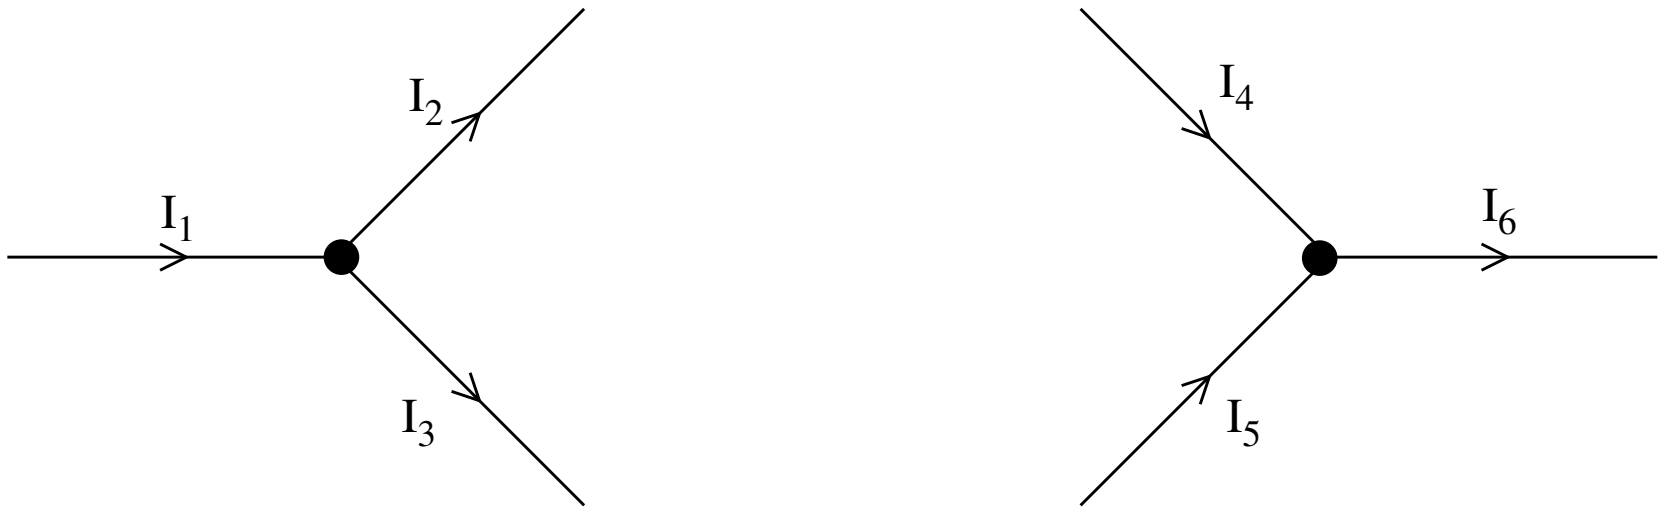

Figure 2: Basic diverging (left) and merging (right) nodes

(A1) There exists a given distribution matrix A that prescribes the turning percentage of drivers from incoming links to the outgoing links, when the number of the outgoing links is ≥ 2.

(A2) Subject to (A1), the flux is maximized through the junction.

Remark 2.1. *As discussed in [10], the above conditions satisfied by a Riemann Solve amount to a linear programming problem, where the flux is maximized with constraints given by the demand and supply of incoming and outgoing links, as well as the distribution matrix A.*

2.2.1 Diverge model

Consider the diverging node of Figure 2, with one incoming links I_1 and two outgoing links I_2, I_3. Each link I_i is characterized by a spatial interval $[a_i,\, b_i]$, a fundament diagram $f_i(\cdot)$ and a flow capacity C_i. The demand function $D_1(t)$ and the supply functions $S_i(t)$ for $i = 2,\, 3$ are defined as follows

$$D_1(t) \;=\; \begin{cases} C_1, & \text{if} \;\; r_1(t,\, b_1-) = 1 \\ f_1\big(\rho_1(t,\, b_1-)\big), & \text{if} \;\; r_1(t,\, b_1-) = 0 \end{cases} \tag{2.5}$$

$$S_i(t) \;=\; \begin{cases} f_i\big(\rho_i(t,\, b_i-)\big), & \text{if} \;\; r_i(t,\, a_i+) = 1 \\ C_i, & \text{if} \;\; r_i(t,\, a_i+) = 0 \end{cases} \tag{2.6}$$

Recall that the regime variable satisfies $r = 1$ if the traffic is in congested phase and $r = 0$ if traffic is in free flow phase.

The diverging model requires the knowledge of a (possibly time-dependent) vehicle turning rate $\alpha_{1,i} \in \Re_+$, $i = 2, 3$ such that $\alpha_{1,2} + \alpha_{1,3} = 1$. These parameters can be given either endogenously or exogenously, depending on the context in which the model is considered.

We employ the diverging model satisfying first-in-first-out, proposed in [10, 13], the flow leaving the incoming link $q_{out,1}(t)$ can be easily solved by the LP and is given by

$$q_{out,1}(t) \;=\; \min\left\{D_1(t),\; \frac{S_2(t)}{\alpha_{1,2}},\; \frac{S_3(t)}{\alpha_{1,3}}\right\} \tag{2.7}$$

The inflow on link I_i is given by $q_{in,i}(t) = \alpha_{1,i} \cdot q_{out,1}(t)$, $i = 2, 3$.

2.2.2 Merge model

Consider the merging node of Figure 2, with two incoming links I_4, I_5 and one outgoing link I_6. The demand and supply functions for incoming and outgoing links respectively, are defined in the same way as in (2.5), (2.6). It has been pointed out in [10] that for this merging junction (more generally, for junctions with more incoming links than outgoing links), the LP problem defined above does not have a unique solution. Therefore, we need to introduce a right-of-way parameter $p \in (0, 1)$ and a priority rule in the case of two incoming links I_4, I_5 and one outgoing link I_6.

(R1) The actual fluxes $q_{out,4}$, $q_{out,5}$ out of links I_4, I_5 satisfy

$$p \cdot q_{out,4} \;=\; q_{out,5}$$

for some right-of-way parameter $p \in (0, 1)$.

However, one should notice that the rule (R1) is sometimes incompatible with the assumption (A2). See Figure 3 for an illustration.

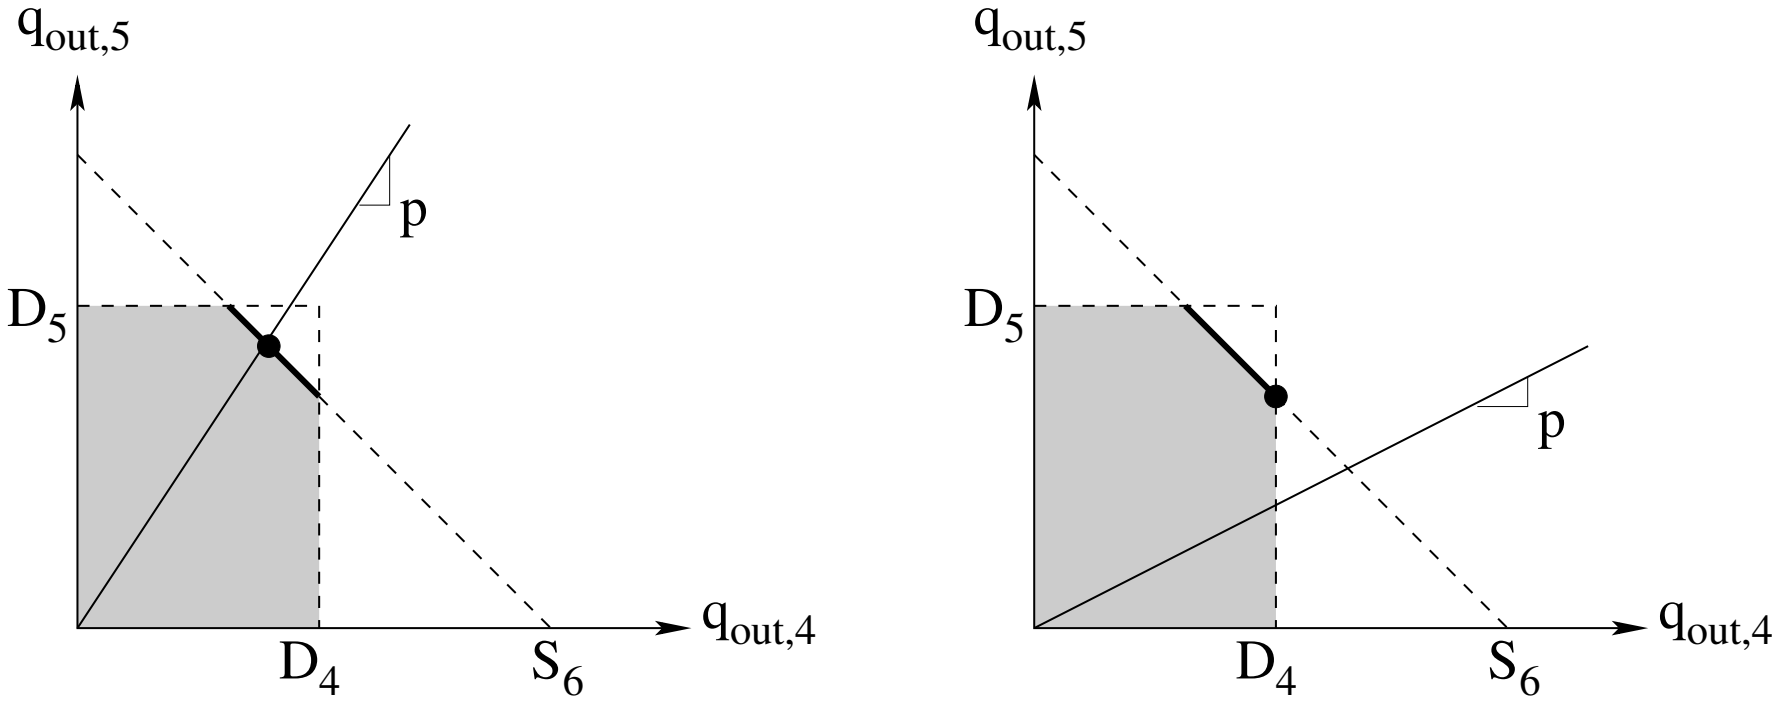

Figure 3: Left: Rule (R1) is compatible with (A2), therefore there exists a unique point satisfying both. Right: Rule (R1) is incompatible with (A2), in this case, the Riemann Solver chooses the point that is closest to the line with slope p among all points that maximizes the flux.

Whenever there is a conflict between (R1) and (A2), we will respect (A2) and relax (R1) so that the solution to the LP problem is chosen to be the point that approximates best the rule R1 among the set of points that attain the maximal flux. The Riemann Solver defined in this way uniquely determines a solution to the Riemann problem at junctions of merging type.

2.3 Shock formation and propagation within the link

In the previous section, we have expressed the merging and diverging models in terms of demand and supply, which are functions of the regime variables r at the upstream and downstream boundaries. Thus the last missing component of a complete network model is the determination of the traffic states (free flow or congested) on the boundaries of each link. This is the primary goal of this section.

The key point of our analysis will be the location of a separating shock within the link. The separating shock is a generalized characteristic (for a precise definition and theoretical results, we refer the readers to [11]), which separates each link into two zones of free flow traffic ($r = 0$) and congested traffic ($r = 1$).

We begin with showing that if the network is initially empty, then there can be at most one separating shock within each link

Lemma 2.2. *For every link I_i and any solution $y_i(t, x) = \big(q_i(t, x), r_i(t, x)\big)$ with $y_i(0, x) = (0, 0)$, the following statement holds:*

1. *For every $t \geq 0$, there exists at most one $x_i^*(t) \in (a_i, b_i)$ such that $r_i(t, x_i^*(t)-) < r_i(t, x_i^*(t)+)$*
2. *For all $x \in [a_i, b_i]$,*

$$\begin{array}{rclcrcl} r_i(t, x) & = & 0, & \quad & \text{if} \ x & < & x_i^*(t) \\ r_i(t, x) & = & 1, & \quad & \text{if} \ x & > & x_i^*(t) \end{array}$$

Proof. See [6]. □

Remark 2.3. *Lemma holds also for the case of network completely in free regime initially. In other words it is sufficient to ask for $r_i(0, x) = 0$ for every i and x.*

By Lemma 2.3, the separating shock will emerge from the downstream boundary b_i of the link, and propagate towards the interior of the link. The speed of this separating shock is given by the Rankine-Hugoniot condition [17], see Figure 4.

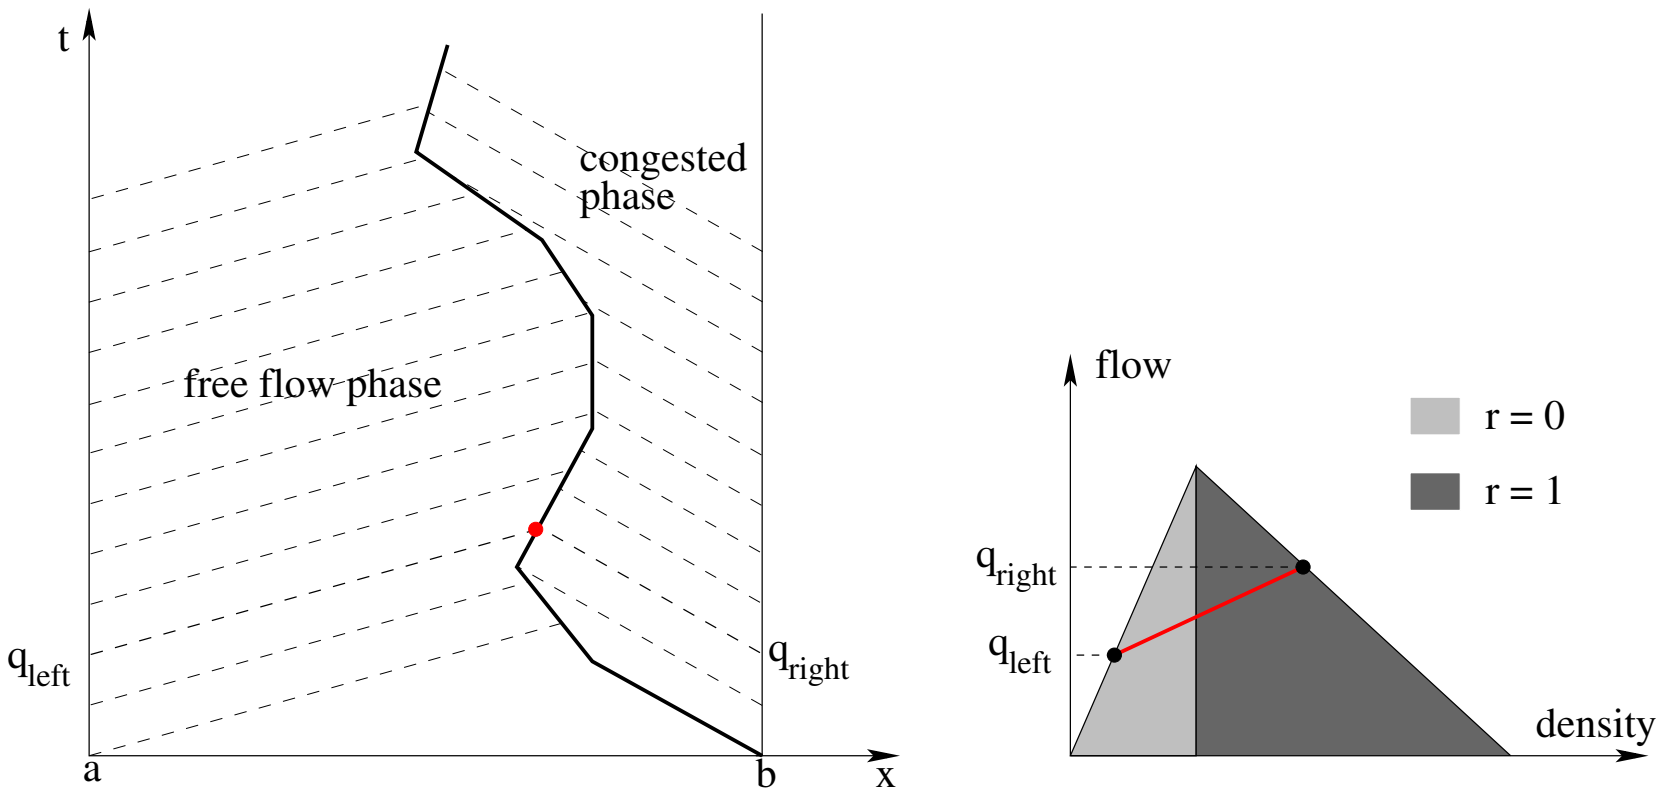

Figure 4: Example of the separating shock. Left figure: the $t - x$ domain is separated by the shock into two phases. Right figure: the speed of the separating shock $\frac{d}{dt}x_i^*(t)$ is given by the Rankine-Hugoniot condition, i.e., the slope of line segment on the fundamental digram that connects $(q_{left}, 0)$ and $(q_{right}, 1)$.

It is clear that as long as the separating shock remains in the interior of the link I_i, the two boundary conditions do not interact. As a result, the exit of an incoming link remains in the congested phase, while the entrance of an outgoing link remains in the free flow phase. Consequently, the demand-supply functions and hence the junction models are expressed entirely with endogenous parameters C_i, $\alpha_{i,j}$. On the other hand, if the separating shock reaches the boundary, it becomes a latent shock. We distinguish between two extreme cases.

i) The the shock reaches the exit, i.e. $x_i^*(t) = b_i$. In this case, the current link is entirely in free flow phase. The boundary condition at $x = a_i$ directly influences the boundary condition at $x = b_i$, in a way mathematically expressed by

$$q_i\,(t,\, b_i-) \;=\; q_i\left(t - \frac{L_i}{k_i},\, a_i\right) \tag{2.8}$$

where L_i is the length of the link, k_i is the speed of forward wave propagation. See Figure 5 for an illustration.

ii) the shock reaches the entrance, i.e. $x_i^*(t) = a_i$. In this case, the current link is dominated by congestion, and the boundary conditions at $x = b_i$ directly affect the boundary condition at $x = a_i$,

$$q_i\,(t,\, a_i+) \;=\; q_i\left(t - \frac{L_i}{w_i},\, b_i\right) \tag{2.9}$$

where w_i is the speed of backward wave propagation.

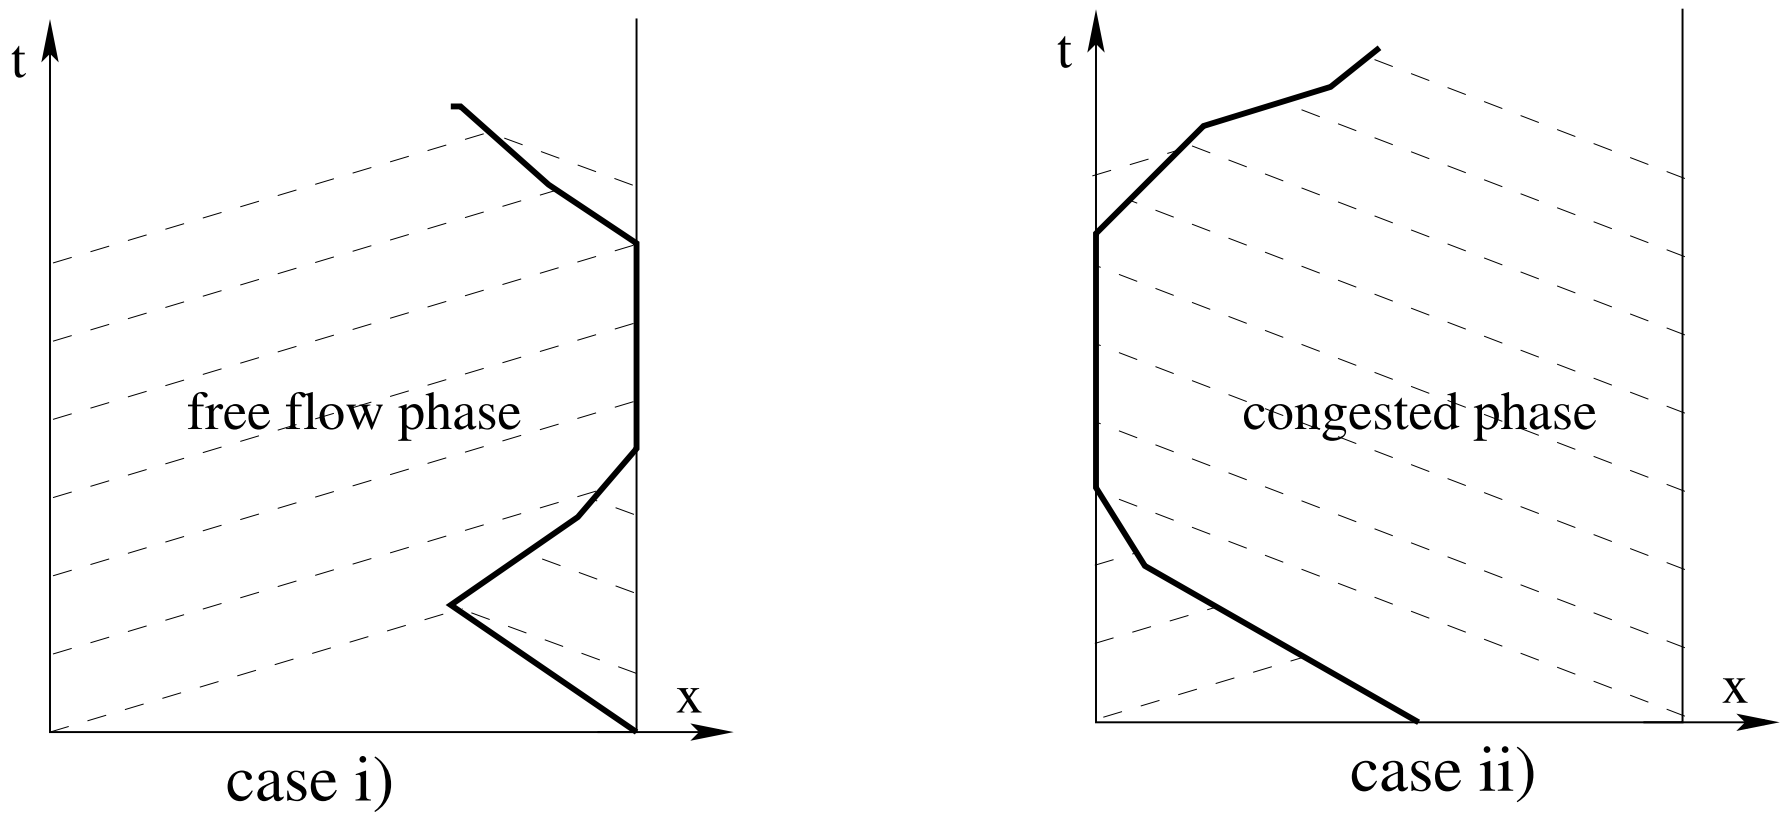

Figure 5: Example of latent separating shocks. Case i): the separating shock reaches the right (downstream) boundary. Case ii): the separating shock reaches the left (upstream) boundary.

In either case, the demand-supply functions will involve boundary flows (2.9), (2.8), which are exogenous. The next key step towards the Link-based Kinematic Wave Model is to detect these two extreme cases using only boundary flows $q_i(\cdot,\, a_i)$, $q_i(\cdot,\, b_i)$. This can be done using the Lax-Hopf formula [14, 15, 32, 33, 42].

2.4 The Lax-Hopf formula approach for detecting latent shock

We will present, in this article, another solution method known as the Lax-Hopf formula. Initially introduced in [32, 33], then extended in [1, 2, 37], and applied to traffic theory in [8, 14, 15], the Lax-Hopf formula provides a new characterization of the solution to the hyperbolic conservation law and Hamilton-Jacobi equation. The Lax formula is derived from the characteristics equations associated with the Hamilton-Jacobi PDE, which arise in the classical calculus of variations and in mechanics, see [17] for a complete discussion.

In view of the following conservation law on link I_i,

$$\frac{\partial}{\partial t}\rho_i(t,\,x) + \frac{\partial}{\partial x} f_i\big(\rho_i(t,\,x)\big) \;=\; 0,$$

let us introduce the function $N_i(\cdot,\,\cdot) : [0,\,+\infty) \times [a,\,b] \to \Re$, such that

$$\frac{\partial}{\partial x}N_i(t,\,x) \;=\; -\,\rho_i(t,\,x), \qquad \frac{\partial}{\partial t}N_i(t,\,x) \;=\; f_i\big(\rho_i(t,\,x)\big) \tag{2.10}$$

One way of interpreting $N_i(t,\,x)$ is that it is the cumulative number of vehicles that have passed location x by time t. The function $N_i(t,\,x)$ is sometimes referred to as Moskowitz function or Newell-curves and has been studied extensively, in [8, 9, 14, 41, 42]. A well-known property of $N_i(\cdot,\,\cdot)$ is that it satisfies the following Hamilton-Jacobi equation

$$\frac{\partial}{\partial t}N_i(t,\,x) - f_i\left(-\frac{\partial}{\partial x}N_i(t,\,x)\right) \;=\; 0, \qquad (t,\,x) \in [0,\,+\infty) \times [a_i,\,b_i] \tag{2.11}$$

Consider the triangular fundamental diagram given by

$$f_i(\rho) \;=\; \begin{cases} k_i\,\rho & \rho \in [0,\,\rho_i^*] \\ -w_i\,(\rho - \rho_i^{jam}) & \rho \in (\rho_i^*,\,\rho_i^{jam}] \end{cases} \tag{2.12}$$

where $k_i \in \Re_+$ is the speed of forward propagation of waves, while $w_i \in \Re_+$ is the speed of backward propagation of waves. ρ_i^* is the unique density such that $f_i(\rho_i^*) = C_i$, C_i is the flow capacity. Based on this particular fundamental diagram, let us introduce the concave transformation of the fundamental diagram $f_i(\cdot)$:

$$f_i^*(u) \;\doteq\; \sup_{\rho \in [0,\,\rho_i^{jam}]} \{f_i(\rho) - u\,\rho\} \;=\; C_i - \rho_i^* u, \qquad u \in [-w_i,\,k_i] \tag{2.13}$$

Before we articulate the Lax-Hopf formula, let us define the upstream and downstream boundary conditions.

Definition 2.4. (Boundary conditions for H-J equation (2.11)) *Consider a link I_i with flow capacity C_i. The upstream boundary condition $N_{up,i}(\cdot) : [0,\,+\infty) \to \Re_+$ and the downstream boundary condition $N_{down,i} : [0,\,+\infty) \to \Re_+$ are non-decreasing, Lipschitz continuous functions with Lipschitz constants C_i, such that $N_{up,i}(0) = N_{down,i}(0) = 0$.*

Note that the last condition in the previous definition is to ensure zero initial condition on the link. The following theorem (Lax-Hopf formula) has been derived separately in various contexts in [8, 14, 37]

Theorem 2.5. (Lax-Hopf formula) *Consider the Hamilton-Jacobi equation (2.11) with flux function (2.12). Let Ω_i be a subset of the domain $[0,\,+\infty) \times [a_i,\,b_i]$ and $c_i(\cdot,\,\cdot) : \Omega_i \to \Re_+$ be the value condition which prescribes the value of $N_i(\cdot,\,\cdot)$ on Ω_i. Then the solution to the Hamilton-Jacobi equation (2.11) with value condition $c_i(\cdot,\,\cdot)$ is given by*

$$N_i(t,\,x) \;=\; \inf\left\{c_i(t-T,\,x-T\,u) + T\,f_i^*(u)\right\} \tag{2.14}$$

such that $u \in [-w_i,\,k_i]$, $T \geq 0$ and $(t-T,\,x-T\,u) \in \Omega_i$.

Next, we will instantiate the general Lax-Hopf formul (2.14) to the special case with two boundary conditions, that is, the case where $\Omega_i = [0, +\infty) \times \{a_i, b_i\}$, and $c_i(\cdot, \cdot)$ is given by $N_{up,i}(\cdot)$ and $N_{down,i}(\cdot)$. The next result was given in [42].

Proposition 2.6. (Instantiation of Lax-Hopf formula for boundary conditions) *Given upstream and downstream boundary conditions $N_{up,i}(\cdot)$, $N_{down,i}(\cdot)$ as in Definition 2.4, the solution to the H-J equation (2.11) is given by*

$$N_i(t, x) \;=\; \min\left\{ N_{up,i}\left(t - \frac{x - a_i}{k_i}\right) \;,\quad N_{down,i}\left(t - \frac{b_i - x}{w_i}\right) + \rho_i^{jam}(b_i - x) \right\} \tag{2.15}$$

Remark 2.7. *The geometric meaning of simplified expression (2.15) is clear. Since the triangular fundamental diagram implies only two characteristic speeds, the point (t, x) can be the intersection of at most two characteristic lines, one with positive speed k, another with negative speed $-w$. Thus the Lax-Hopf formula reduces to the comparison between these two cases. Such insight was provided by Newell [42].*

Recall that the separating shock $x_i^*(\cdot) : [0, +\infty) \to [a, b]$ is a continuous curve in the temporal-spatial domain. The next proposition is the key for detecting latent shocks and switch of regime variables r_i.

Proposition 2.8. *Let $N_i(\cdot, \cdot) : [0, +\infty) \times [a_i, b_i]$ be the unique viscosity solution to Hamilton-Jacobi equation (2.11) with zero initial condition and appropriate upstream and downstream boundary condition $N_{up,i}(\cdot)$, $N_{down,i}(\cdot)$. Then the following statements hold:*

1. *For any $(t, x) \in [0, +\infty) \times [a_i, b_i]$,*

$$x \;\le\; x_i^*(t) \quad \textit{iff} \quad N_{up,i}\left(t - \frac{x - a_i}{k_i}\right) \;\le\; N_{down,i}\left(t - \frac{b_i - x}{w_i}\right) + \rho_i^{jam}(b_i - x) \tag{2.16}$$

$$x \;\ge\; x_i^*(t) \quad \textit{iff} \quad N_{up,i}\left(t - \frac{x - a_i}{k_i}\right) \;\ge\; N_{down,i}\left(t - \frac{b_i - x}{w_i}\right) + \rho_i^{jam}(b_i - x) \tag{2.17}$$

2. *In particular, for all $t \ge 0$,*

$$x_i^*(t) \;=\; a_i \quad \textit{iff} \quad N_{up,i}(t) \;\ge\; N_{down,i}\left(t - \frac{L_i}{w_i}\right) + \rho_i^{jam} L_i \tag{2.18}$$

$$x_i^*(t) \;=\; b_i \quad \textit{iff} \quad N_{up,i}\left(t - \frac{L_i}{k_i}\right) \;\le\; N_{down,i}(t) \tag{2.19}$$

Proof. By standard PDE theory [17], the quantity shown in the right hand side of (2.14) is minimized along a path p in the temporal-spatial domain if and only if that path is precisely a characteristic line connecting the point (t, x) to the boundary. In addition, fix any t, the point x is to the left (right) of the separating shock if and only if (t, x) is connected to the left (right) boundary a_i (b_i) by a characteristic line, see Figure 5. Thus (2.16), (2.17) follow from the above two observations. ☐

3 The DAE system

The dynamics described via the separating shock and Lax-Hopf formula (Section 2.4), together with the appropriate Riemann Solver (Section 2.2), can be explicitly written as a system of differential algebraic equations. The DAE system is a common mathematical form of network loading problems arising from analytical dynamic traffic assignment [20, 21]. The fact that the LWR-based network flow models – which are usually viewed and studied as a constrained *partial differential algebraic equation* (PDAE) system [31, 45] – can be re-formulated as an explicit DAE system, provides new ground for mathematical analysis and computation.

Let us consider a road network represented by a directed graph $(\mathcal{A},\,\mathcal{V})$, where $\mathcal{A}$, $\mathcal{V}$ denotes the set of links and nodes, respectively. It is not restrictive to assume that all the nodes are of the type depicted in Figure 2 (notice that one may consider nodes with more complicated topology upon acquisition of appropriate Riemann Solvers, which does not change the nature of the current DAE formulation). We begin by introducing the following notations for each link $I_i\in\mathcal{A}$:

$q_{in,i}(\cdot)$,	the flow of cars entering link I_i,
$q_{out,i}(\cdot)$,	the flow of cars exiting link I_i,
$D_i(\cdot)$,	the maximum flow allowed to exit the link I_i,
$S_i(\cdot)$,	the maximum flow allowed to enter the link I_i,
$N_{up,i}(\cdot)$,	the cumulative number of cars that have entered link I_i,
$N_{down,i}(\cdot)$,	the cumulative number of cars that have exited link I_i,

In addition, let the sets of merging nodes and diverging nodes be $\mathcal{M}$, $\mathcal{D}$, respectively. For each $v\in\mathcal{V}$, denote by $\mathcal{I}^v$ and $\mathcal{O}^v$ the set of incoming links and outgoing links, respectively. For the compactness of notation, we will denote the Riemann Solvers discussed in Section 2.2.2 and 2.2.1 by RS_1 and RS_2, respectively:

$$\begin{aligned}
\big(q_{out,i},\,q_{in,j}\big) &= RS_1\big(D_i,\,S_j\big), \qquad I_i\in\mathcal{I}^v,\;I_j\in\mathcal{O}^v,\quad v\in\mathcal{M}\\
\big(q_{out,i},\,q_{in,j}\big) &= RS_2\big(D_i,\,S_j\big), \qquad I_i\in\mathcal{I}^v,\;I_j\in\mathcal{O}^v,\quad v\in\mathcal{D}
\end{aligned}$$

We assume that vehicles try to flow into the network from the set of origins $\mathcal{V}_o\subset\mathcal{V}$, at a departure rate $h_{v_o}(\cdot)$ for each $v_o\in\mathcal{V}_o$. For the consistency of notations, and also for the easy transition to a Cauchy problem on networks, we assume that each origin v_o is connected to an virtual link $I_{v_o}\in\mathcal{I}^{v_o}$ that is sufficiently long. Vehicles are assumed to be traveling along such virtual link before then can enter the network through the origin. However, the actual departure rate will be subject to the constraints at v_0 described by the junction model. Such consideration is necessary since when the spillback occurs on the links immediately downstream to the origin node, not only the travelers from upstream links but also the travelers departing from the origin node will be affected. As a result, the desired departure rate $h_{v_0}(t)$ may differ from the actual departure rate.

Using (2.5)-(2.6) and (2.18)-(2.19), we can easily derive the following DAE system:

$$\frac{d}{dt}N_{up,i}(t) \;=\; q_{in,i}(t), \qquad \frac{d}{dt}N_{down,i}(t) \;=\; q_{out,i}(t), \qquad I_i\in\mathcal{A} \tag{3.20}$$

$$D_i(t)=\begin{cases} q_{in,i}\left(t-\frac{L_i}{k_i}\right) & \text{if}\;\; N_{up,i}\left(t-\frac{L_i}{k_i}\right)=N_{down,i}(t)\\ C_i & \text{if}\;\; N_{up,i}\left(t-\frac{L_i}{k_i}\right)>N_{down,i}(t)\end{cases}, \qquad I_i\in\mathcal{I}^v \tag{3.21}$$

$$S_j(t)=\begin{cases} q_{out,j}\left(t-\frac{L_j}{w_j}\right) & \text{if}\;\; N_{up,j}(t)=N_{down,j}\left(t-\frac{L_j}{w_j}\right)+\rho_j^{jam}\,L_j\\ C_j & \text{if}\;\; N_{up,j}(t)<N_{down,j}\left(t-\frac{L_j}{w_j}\right)+\rho_j^{jam}\,L_j\end{cases}, \qquad I_j\in\mathcal{O}^v \tag{3.22}$$

$$\big(q_{out,i},\,q_{in,j}\big) \;=\; RS_1\big(D_i,\,S_j\big), \qquad I_i\in\mathcal{I}^v,\;I_j\in\mathcal{O}^v,\quad v\in\mathcal{M} \tag{3.23}$$

$$\big(q_{out,i},\,q_{in,j}\big) \;=\; RS_2\big(D_i,\,S_j\big), \qquad I_i\in\mathcal{I}^v,\;I_j\in\mathcal{O}^v,\quad v\in\mathcal{D} \tag{3.24}$$

$$q_{in,j} \;=\; \sum_{I_i\in\mathcal{I}^v} \alpha_{i,j}\, q_{out,i}(t), \qquad I_j\in\mathcal{O}^v, \quad v\in\mathcal{V} \tag{3.25}$$

where L_i is the length of link I_i. k_i, w_i are the forward and backward wave propagation speeds, respectively. ρ_i^{jam} is the jam density on link I_i.

4 Analysis of the continuous-time model

The DAE system (3.20)-(3.25) is very convenient for computation. In fact, a direct time-discretization of the system coincides with the Link Transmission Model proposed earlier in [51]. On the other hand, due to the numerous discontinuities emerging from (3.21), (3.22) and the Riemann Solvers (3.23), (3.24), the DAE formulation is not convenient for mathematical analysis. In particular, it is difficult to show solution existence and uniqueness, as well as continuous dependence on the initial/boundary conditions, by directly analyzing the DAE system.

This section is dedicated to the analytical properties of the continuous-time solution mentioned above. In order to investigate our model in a framework that allows rigorous mathematical analysis, we will use a wave-front tracking algorithm as means of approximating the solution.

4.1 A wave-front tracking algorithm on networks and existence of solutions

A wave-front tracking algorithm consists in a procedure to construct piecewise constant approximation of solution to equation (1.1) on the network. We briefly summarize here the main steps, referring to [3] for a detailed description and to [22] for the network case.

Given a discretization parameter δ and initial-boundary conditions in BV – the space of functions with *bounded variation*, an approximate solution is constructed in the following way:

- Approximate initial-boundary conditions by piecewise constant functions and solve the Riemann Problems (RPs) at discontinuities of such approximations and at junctions. Approximate rarefactions by rarefaction shocks of size δ;
- Use the piecewise constant solution obtained piecing together the solutions to RPs up to the first time of interaction of two travelling waves (shocks) or of a wave with a junction;
- Then solve a new RP created by the interaction and prolong the solution up to next interaction time, and so on.

To ensure the feasibility of such construction, it is enough to control the number of waves and interactions. This is easily done in scalar case on a single link since both the number of waves and the BV norm are decreasing in time (see [3] for details). For networks, one has to carefully estimate all quantities, due to interaction of waves with junctions. Indeed, when a wave interacts with a junction from a link, it may produce new waves in all other links connected to the junction. For the network case see [22, 23].

Now consider a sequence of approximate solutions ρ_δ constructed by a wave-front tracking algorithm. If one can provide estimates on the total variation, then as δ tends to zero ρ_δ tends to a weak entropic solution of (1.1) on the whole network. Technically one uses compactness in BV provided by Helly's Theorem and the weak formulation of equation (1.1) (see [3, 22]).

Definition 4.1. *Fix an approximate wave front tracking solution* ρ_δ *and a node* J. *An incoming link* I_i *is said to have a good datum at* J *at time* t *if*

$$r_i(t, b_i-) \;=\; 1$$

and a bad datum otherwise. Similarly, we say that an outgoing link I_j *has a good datum at* J *at* t *if*

$$r_j(t, a_j+) \;=\; 0$$

and a bad datum otherwise.

In [23] a general existence theorem (Theorem 5.1) for the weak solution at a junction was provided based on properties of the given Riemann Solver. More precisely, three sufficient conditions for existence are given:

(P1) The solution to Riemann problems depends only on the values of bad data.

(P2) For waves interacting with a junction, the change in flux variation (i.e. the sum of flux jumps over all waves) due to the interaction is bounded by the change in flux through the junction and by the flux jump of the interacting wave.

(P3) Interactions of waves bringing a flux decrease produce a decrease in the flux through the junction.

Proposition 4.2. *The Riemann Solvers for merge and diverge junctions in Section 2.2 satisfy properties (P1)-(P3), thus the weak solutions to the Cauchy problem at the junctions exist. Furthermore, the global solution to the Cauchy problem on a network exists.*

Proof. The case of merge was already treated in [23], thus we focus on the diverge case.
From formulae (2.5), (2.6) and Definition 4.1, we have that supply and demands are determined only by bad data, thus property (P1) follows.
From (2.7), we can deduce that the change in the flux through the junction is proportional to the flux jump of the interacting wave. Moreover, the flux jumps in all roads, after the interaction, is proportional to the change in the flux through the junction. Thus (P2) follows.
Finally, a wave bringing a decrease of flux produces a decrease of supply-demand functions, thus, again by (2.7), a decrease in the flux through the junction. So (P3) is granted. Thus Theorem 5.1 of [23] implies that a weak solution exists at the junction.

To show global existence of a weak solution, one only needs to notice that the key feature of conservation law models is the finite speed of propagation. Thus if the local existence is guaranteed, so will be the global existence. □

Remark 4.3. *The existence result in Proposition 4.2 also applies to boundary value problems on networks. The boundary conditions can be easily transformed into an initial condition by introducing virtual links, as discussed in Section 3.*

4.2 Well-posedness and uniqueness of solutions

To prove uniqueness and well-posedness for (1.1) one may rely on techniques such as Kruzhov's entropies (see [11]), Bressan-Liu-Yang functional (see [3]) or generalized tangent vectors (see

[22]). For networks, it happens that generalized tangent vectors appear to be the most convenient tool.

Given a piecewise constant function $f : [a, b] \to R$, a tangent vector is given by shifts of the discontinuity points of f. More precisely, let us indicate by t_i the discontinuities of f, where $t_0 = a < t_1 \leq \cdots < t_N < t_{N+1} = b$, and by f_i the value attained by f on $[t_{i-1}, t_i]$. Then a tangent vector to f is given by $\xi = (\xi_1, \ldots, \xi_N) \in R^N$. For each ε, the corresponding perturbation of f is given by:

$$f_\varepsilon(x) = f_i \qquad x \in [t_{i-1} + \varepsilon\xi_{i-1}, t_i + \varepsilon\xi_i[$$

for $i = 1, \ldots, N+1$, where we set $\xi_0 = \xi_{N+1} = 0$.
The norm of ξ is defined as:

$$\|\xi\| = \sum_{i=1}^{N} |\xi_i| \, |f(t_i+) - f(t_i-)|,$$

in other words the tangent vector norm is the sum of norms of ξ_i multiplied by the size of the shifted jumps.

To prove uniqueness and well-posedness one proceeds as follows. Given piecewise constant initial-boundary conditions, one considers tangent vectors to them. Then one proves that the norms of tangent vectors remain bounded along approximate wave-front tracking solutions. This implies that L^1 distances are uniformly bounded, see [22] for details.
The key fact in such procedure is that for interactions of waves with junctions the norm of tangent vectors changes in the same way as the jumps in the fluxes. More precisely, let us consider a junction J and assume the interacting wave (ρ_i^-, ρ_i^+) is coming from road I_i. Indicate by Δq_i the jump in the flux and by ξ_i the shift. Also indicate by Δq_j the jump in the flux on some other road I_j resulting from the interaction and by ξ_j the corresponding shift. Then we have the following lemma ([22])

Lemma 4.4. *If the wave on I_i interacts with J without producing waves in the same road I_i, then the shift ξ_j produced on I_j, as a result of the shift ξ_i on I_i, satisfies*

$$\xi_j \left(\rho_j^+ - \rho_j^-\right) = \frac{\Delta q_j}{\Delta q_i} \xi_i \left(\rho_i^+ - \rho_i^-\right) \tag{4.26}$$

where ρ_j^-, ρ_j^+ are the states at J on road I_j before and after the interaction, respectively.

Proof. By Rankine-Hugoniot condition, the speed of wave (ρ_i^+, ρ_i^-) is

$$\frac{f(\rho_i^+) - f(\rho_i^-)}{\rho_i^+ - \rho_i^-}$$

If the wave (ρ_i^-, ρ_i^+) is shifted by ξ_i, then the interaction of this wave with J is shifted in time by

$$-\xi_i \cdot \frac{\rho_i^+ - \rho_i^-}{f(\rho_i^+) - f(\rho_i^-)} = -\xi \cdot \frac{\rho_i^+ - \rho_i^-}{\Delta q_i}$$

Since the shift in time taking place on I_j must be the same, we have

$$\xi_i \frac{\rho_i^+ - \rho_i^-}{\Delta q_i} = \xi_j \frac{\rho_j^+ - \rho_j^-}{\Delta q_j}$$

□

Notice that the quantity $\left|\xi_i\left(\rho_i^+ - \rho_i^-\right)\right|$ is precisely the L^1-distance of two initial conditions on I_i with and without the shift ξ_i at the discontinuity (ρ_i^-, ρ_i^+), respectively. Same situation applies to other roads I_j. Rewrite (4.26) as

$$\left|\xi_j\left(\rho_j^+ - \rho_j^-\right)\right| \;=\; \frac{|\Delta q_j|}{|\Delta q_i|}\left|\xi_i\left(\rho_i^+ - \rho_i^-\right)\right| \tag{4.27}$$

Therefore, to control the norm of tangent vectors one has to check that the multiplication by factors $\frac{|\Delta q_j|}{|\Delta q_i|}$ remains uniformly bounded, regardless of the number of interactions which may occur with the junction. (This bound may indeed fail for general junctions, see [22], Section 5.4, Proposition 5.4.4).

We are ready to prove the following:

Proposition 4.5. *For Merge and Diverge junctions in Section 2.2, the increase in tangent vector norms as in (4.27) is uniformly bounded.*

Proof. The case of Merge junction was already treated in [23], so we focus on Diverge junction. Consider a wave interacting from road i and the one produced on road j, where $i, j = 1, 2, 3$. By (2.7), the variations of the fluxes Δq_i, $i = 1, 2, 3$ satisfy

$$\Delta q_2 \;=\; \alpha_{1,2}\,\Delta q_1, \qquad \Delta q_3 \;=\; \alpha_{1,3}\,\Delta q_1$$

consequently, the multiplication factors satisfy

$$\begin{array}{lll}
\dfrac{\Delta_1}{\Delta_1} \;=\; 1, & \dfrac{\Delta_2}{\Delta_1} \;=\; \alpha_{1,2}, & \dfrac{\Delta_3}{\Delta_1} \;=\; \alpha_{1,3}; \\
\dfrac{\Delta_1}{\Delta_2} \;=\; \dfrac{1}{\alpha_{1,2}}, & \dfrac{\Delta_2}{\Delta_2} \;=\; 1, & \dfrac{\Delta_3}{\Delta_2} \;=\; \dfrac{\alpha_{1,3}}{\alpha_{1,2}}; \\
\dfrac{\Delta_1}{\Delta_3} \;=\; \dfrac{1}{\alpha_{1,3}}, & \dfrac{\Delta_2}{\Delta_3} \;=\; \dfrac{\alpha_{1,2}}{\alpha_{1,3}}, & \dfrac{\Delta_3}{\Delta_3} \;=\; 1.
\end{array}$$

Then the multiplication factors γ_{ij} of tangent vectors are given by the following table (rows i and columns j):

$$\begin{array}{ccc}
1 & \alpha_{1,2} & \alpha_{1,3} \\
\frac{1}{\alpha_{1,2}} & 1 & \frac{\alpha_{1,3}}{\alpha_{1,2}} \\
\frac{1}{\alpha_{1,3}} & \frac{\alpha_{1,2}}{\alpha_{1,3}} & 1
\end{array} \tag{4.28}$$

Since

$$\gamma_{ij}\gamma_{jk} = \gamma_{ik}, \qquad i,\, j,\, k \;=\; 1,\, 2,\, 3$$

we have that the norm of tangent vecotors are uniformly bounded independently from the number of interactions with the junction. □

With the uniform bound on the norm of tangent vectors, one proceeds in a standard way as in [3, 22] to show the well-posedness of Cauchy problem with any BV initial/boundary data. The key is to construct a one-parameter curve joining two initial data, then estimate the length of the curve by integrating the length of the tangent vector.

Remark 4.6. *The argument put forward in this section can be extended to treat networks with origin-destinations. The idea is to replace distribution matrix A with piecewise constant matrix $\widetilde{A}(\cdot)$, and the established results will apply. However, in the process of passing to the limit, the elements of A could be arbitrarily small, causing the norm of tangent vectors to blow up. A detailed analysis of this situation is left as future research.*

5 Numerical example

In the numerical example, we consider a simple network shown in Figure 6 consisting of seven arcs $I_1 - I_7$ and four nodes a, b, c, d. The parameters associated with each link are displayed in Table 1

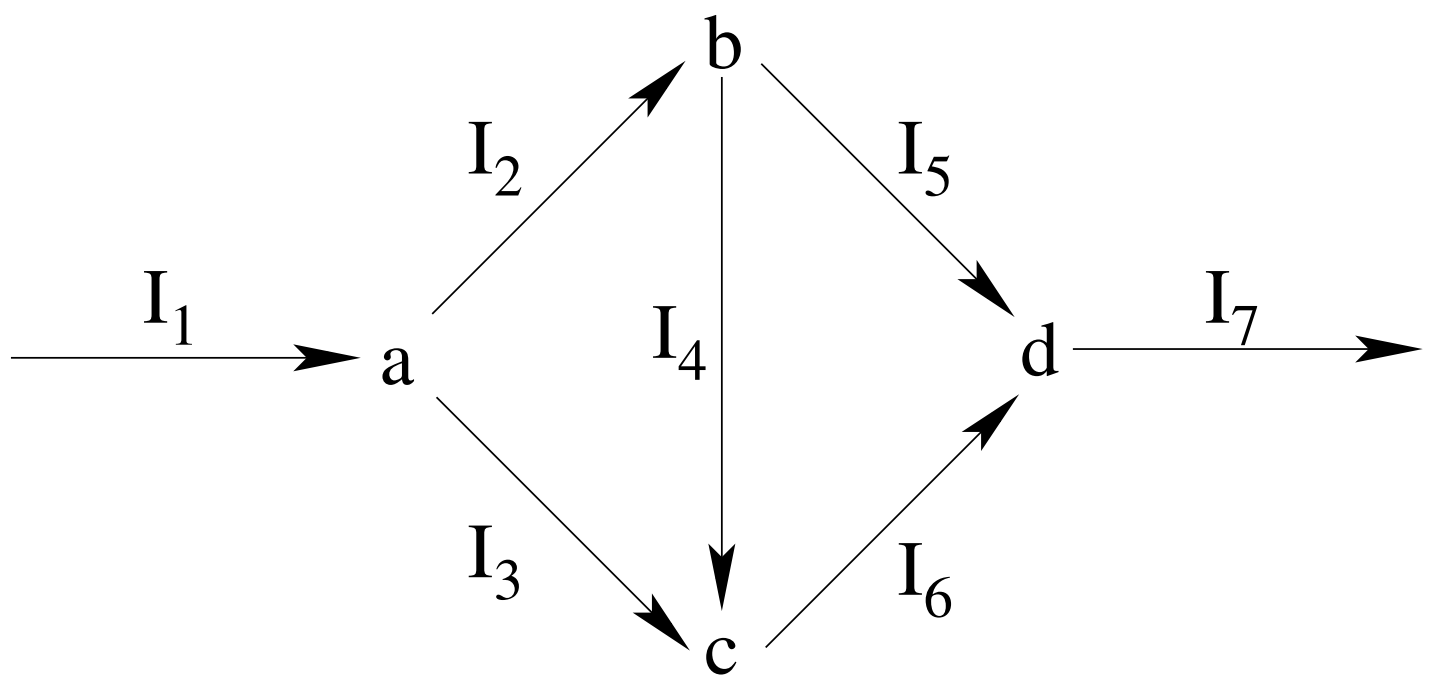

Figure 6: A network example consisting of seven arcs and four nodes

Arc I_i	ρ_i^{jam} (vehicle/mile)	k_i (mile/hour)	w_i (mile/hour)	C_i (vehicle/hour)	L_i (mile)
I_1	400	30	10	3000	3
I_2	200	30	10	1500	3
I_3	400	30	10	3000	3
I_4	100	30	10	750	3
I_5	200	30	10	1500	3
I_6	200	30	10	1500	3
I_7	200	30	10	1500	3

Table 1: Arc parameters for the small network. ρ_i^{jam}: jam density; k_i: forward wave speed; w_i: backward wave speed; C_i: flow capacity; L_i: length.

We consider a time horizon [0, 5] spanning five hours, with a time step $\delta t = 0.05$ hour. We assume vehicles enter the network from link I_1 during a time interval [0.5, 3.75]. The inflow on each time interval is a random variable that is uniformly distributed between 0 and the flow capacity C_1. A plot of the inflow is shown in Figure 7.

The network only contains two types of junctions: the ones with one incoming link and two outgoing links, and the ones with two incoming links and one outgoing link. For simplicity, we set both distribution parameters at diverge junctions and the right-of-way parameters at merge junctions to be 1/2.

As indicated by Table 1, arc I_4 is a bottleneck. In addition, the merge node c also suggests the existence of a potential bottleneck since the capacity of downstream link I_6 is less than the sum of capacities of I_3 and I_4. In order to have a clear visualization of the backward propagation of waves and the separating shocks on each link, we use the boundary data $q_{out,i}$, $q_{in,i}$, $i = 1, \ldots, 7$ obtained from the solution to construct the Moskowtiz function via Hamilton-Jacobi equation (2.11) and Lax-Hopf formula. For the H-J equation, the separating shock no longer represents discontinuity, rather, it is displayed as a 'kink' (discontinuity in the first derivative). The Moskowitz function for links I_1, I_2, I_3 and I_4 are shown in Figure 8,

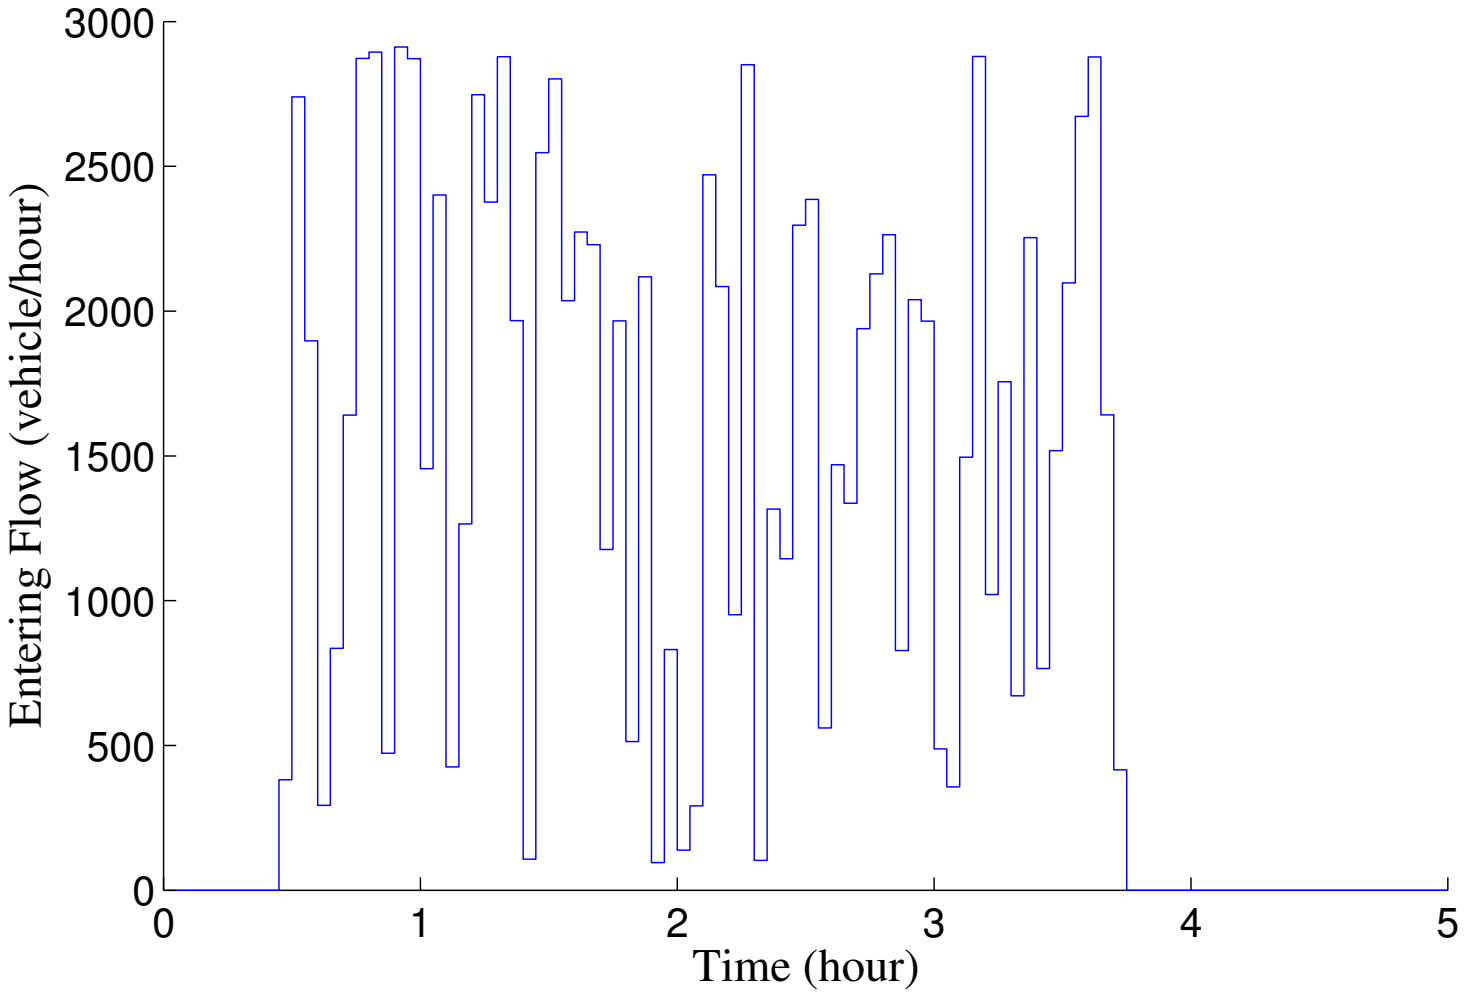

Figure 7: Inflow profile on link I_1.

9, 10 and 11.

From these Moskowitz functions, we can clearly see two types of regimes: the free-flow phase and the congested phase. The mutual boundary of these two regimes is the separating shock. One can observe that the congestion initiates from node c (downstream boundaries of link I_3 and I_4) and propagates backward along links I_3 and I_4, then further to the upstream links I_1 and I_2.

We also observe that on links I_3, I_4, there exist latent shocks on the upstream boundaries a_3 and a_4 for some period, indicating the existence of spillback. To have the most direct visualization of the spillback phenomena, we put the Moskowitz functions of I_1, I_3 (respectively I_2, I_4) side by side, and viewed from above. These are displayed in Figure 12 (13), which clearly shows the formation, propagation and dissipation of congestion on a road network.

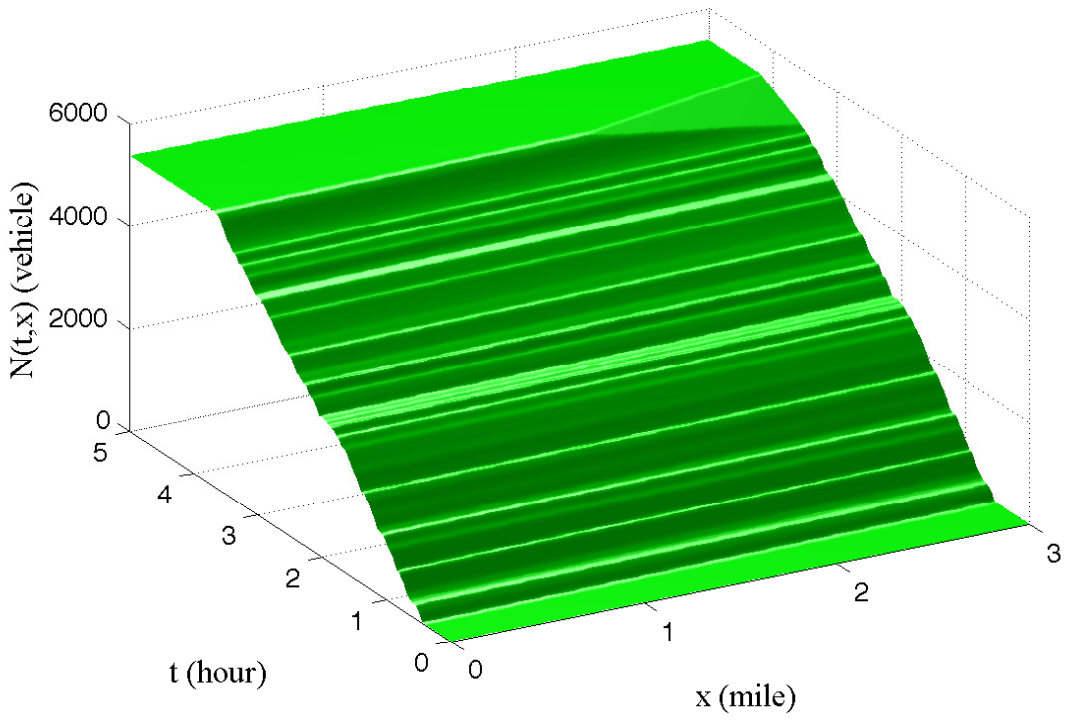

Figure 8: Moskowitz function for link I_1.

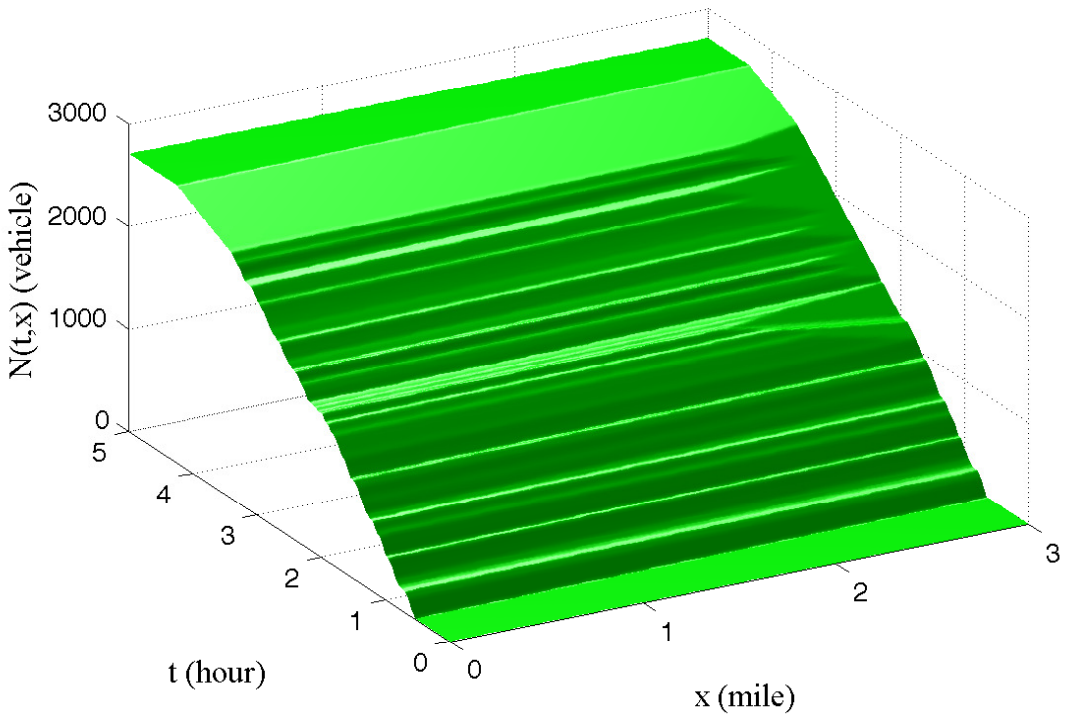

Figure 9: Moskowitz function for link I_2.

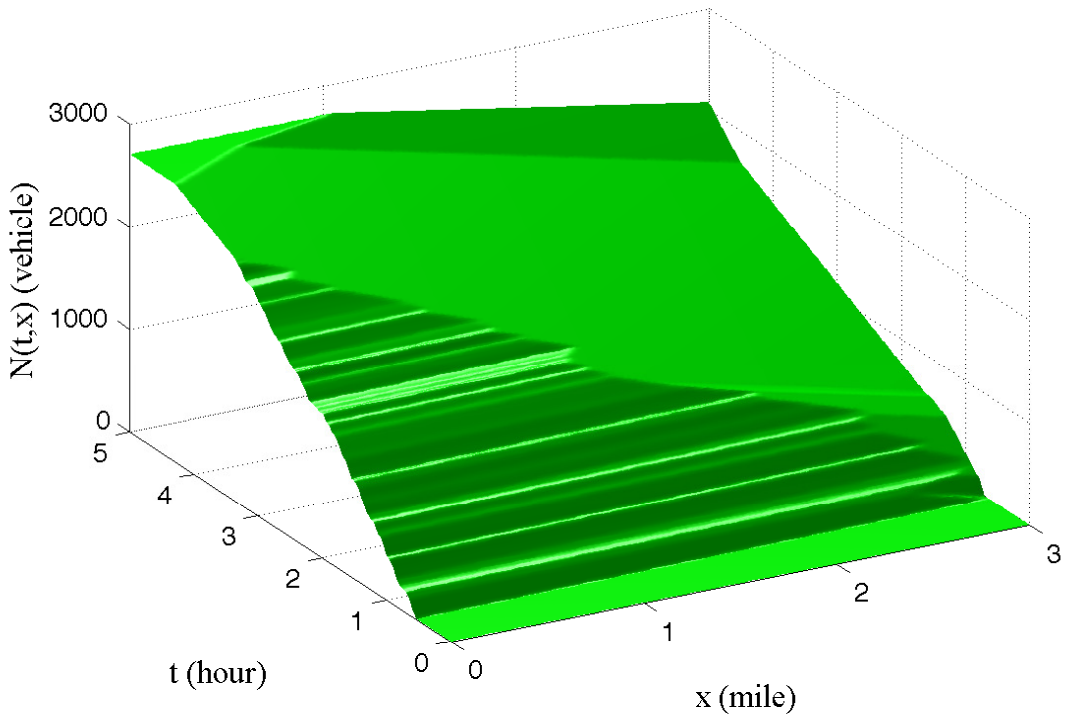

Figure 10: Moskowitz function for link I_3.

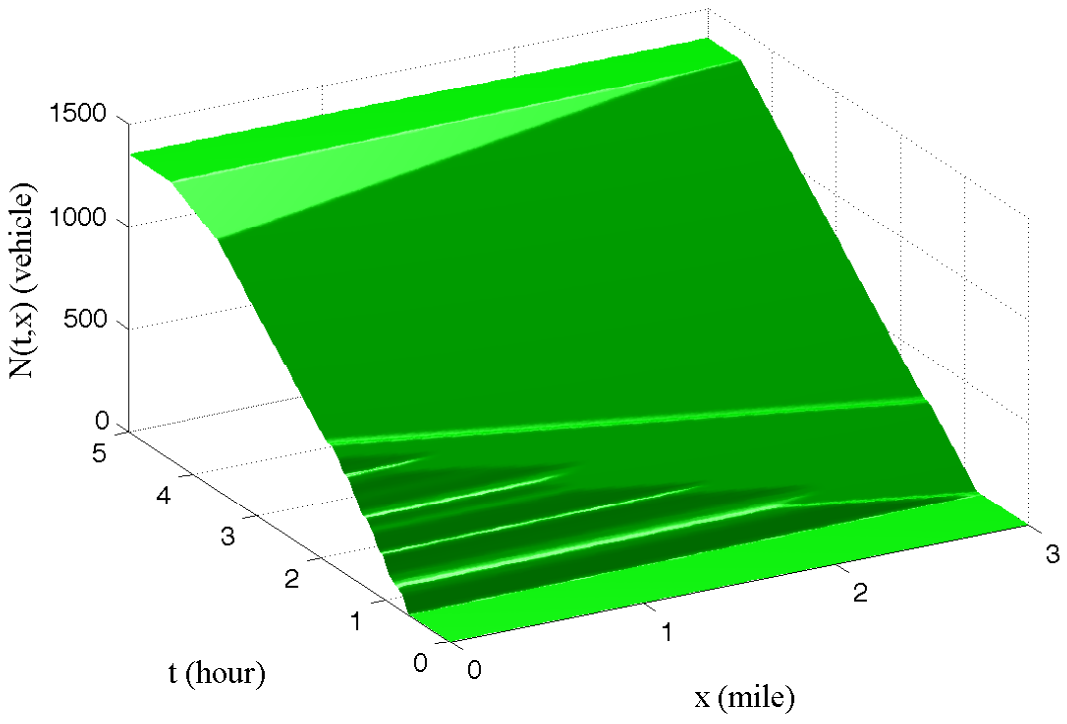

Figure 11: Moskowitz function for link I_4.

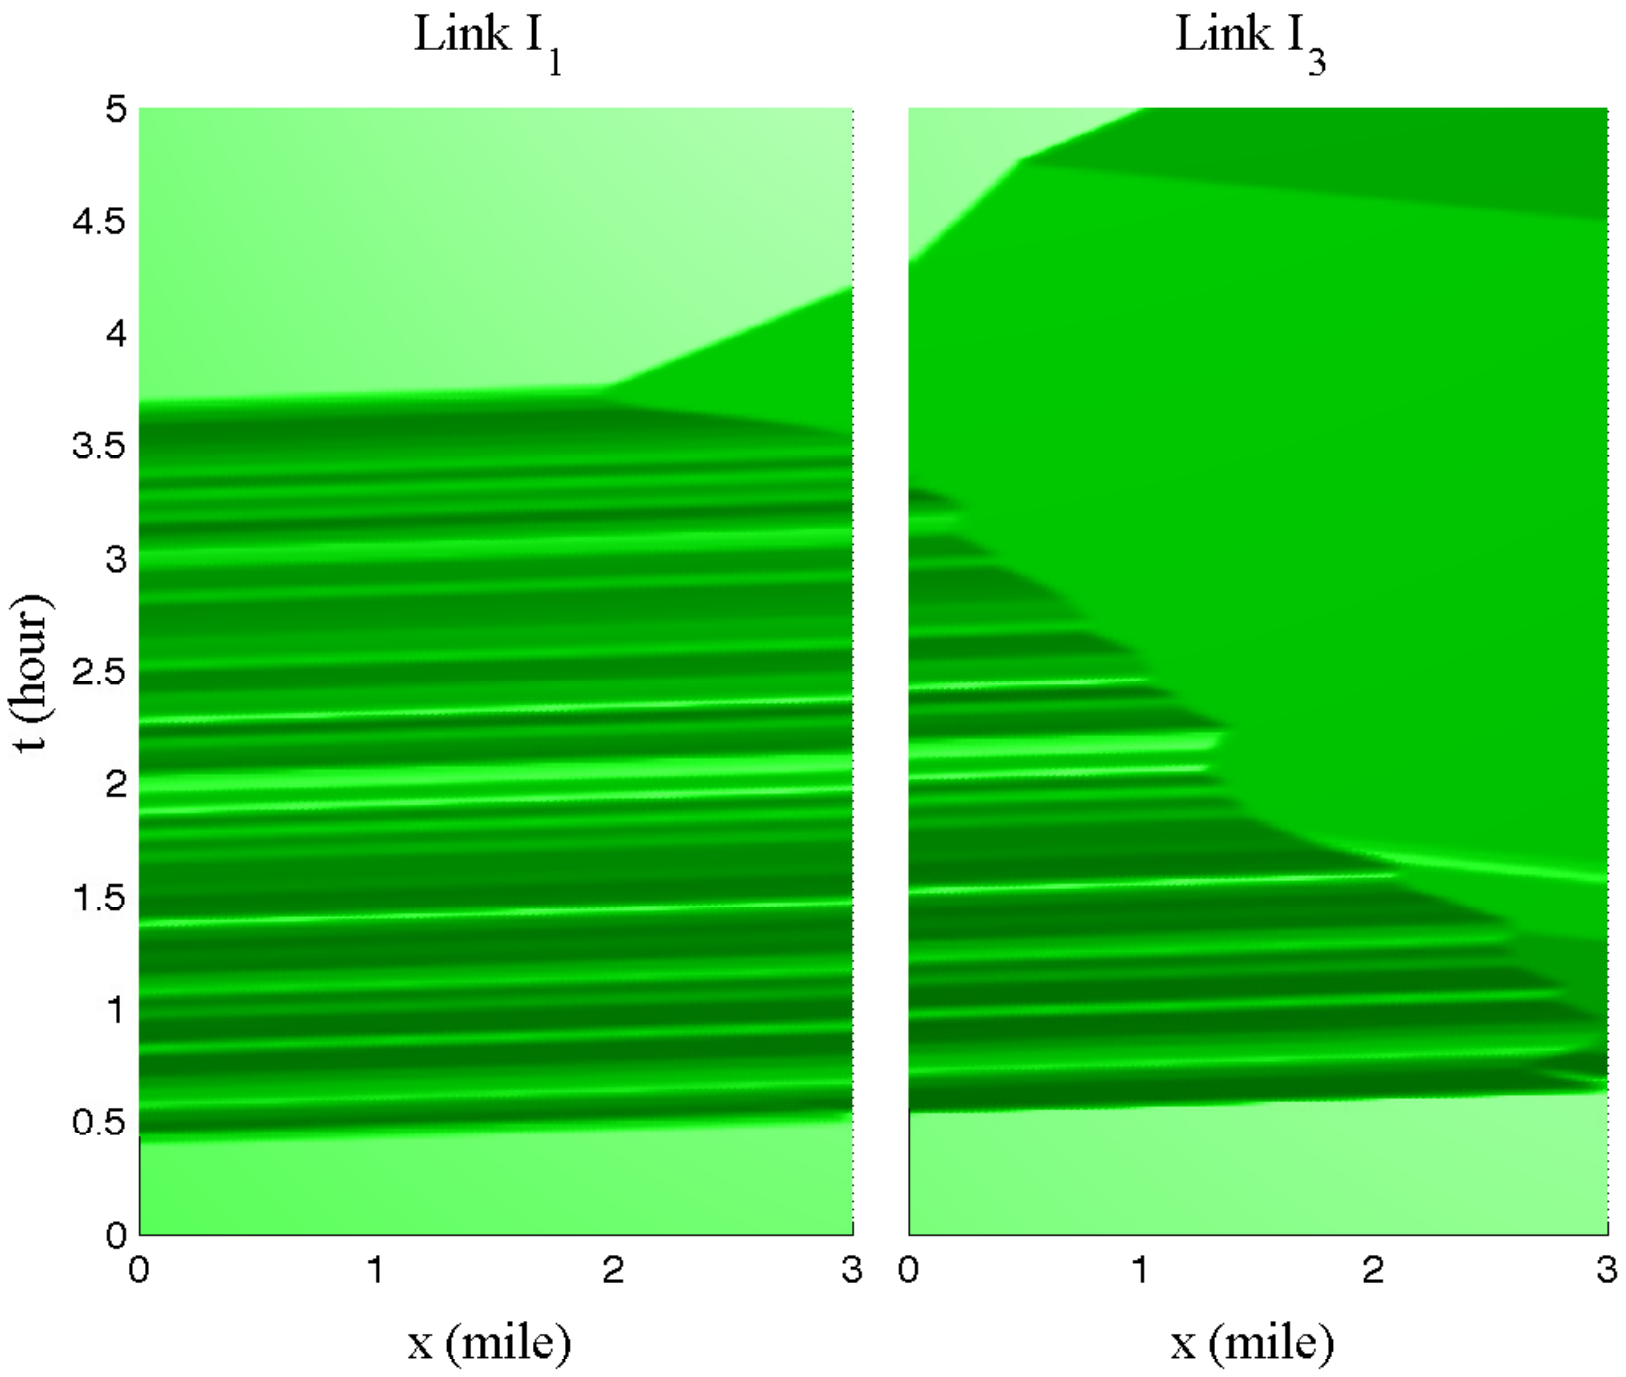

Figure 12: Moskowitz functions on links I_1 and I_3. The congestion on link I_3 spills onto link I_1.

6 Conclusion and future research

This paper presents a continuous-time traffic flow model on vehicular network. We use flow q and regime r as state variables, and implicitly solve the dynamics inside each link using the notion of separating shock and the method known as Lax-Hopf formula. On top of this formulation, a DAE system can be formulated explicitly describing the temporal evolution of the system states. The DAE system is the continuous-time version of the Link Transmission Model [51]. Analytical results of the system such as solution existence, uniqueness and well-posedness of Cauchy problem are established.

As our next step towards an analytical framework of network flow models and DTA models, we will consider networks with Origin-Destination and the users have prescribed route choices.

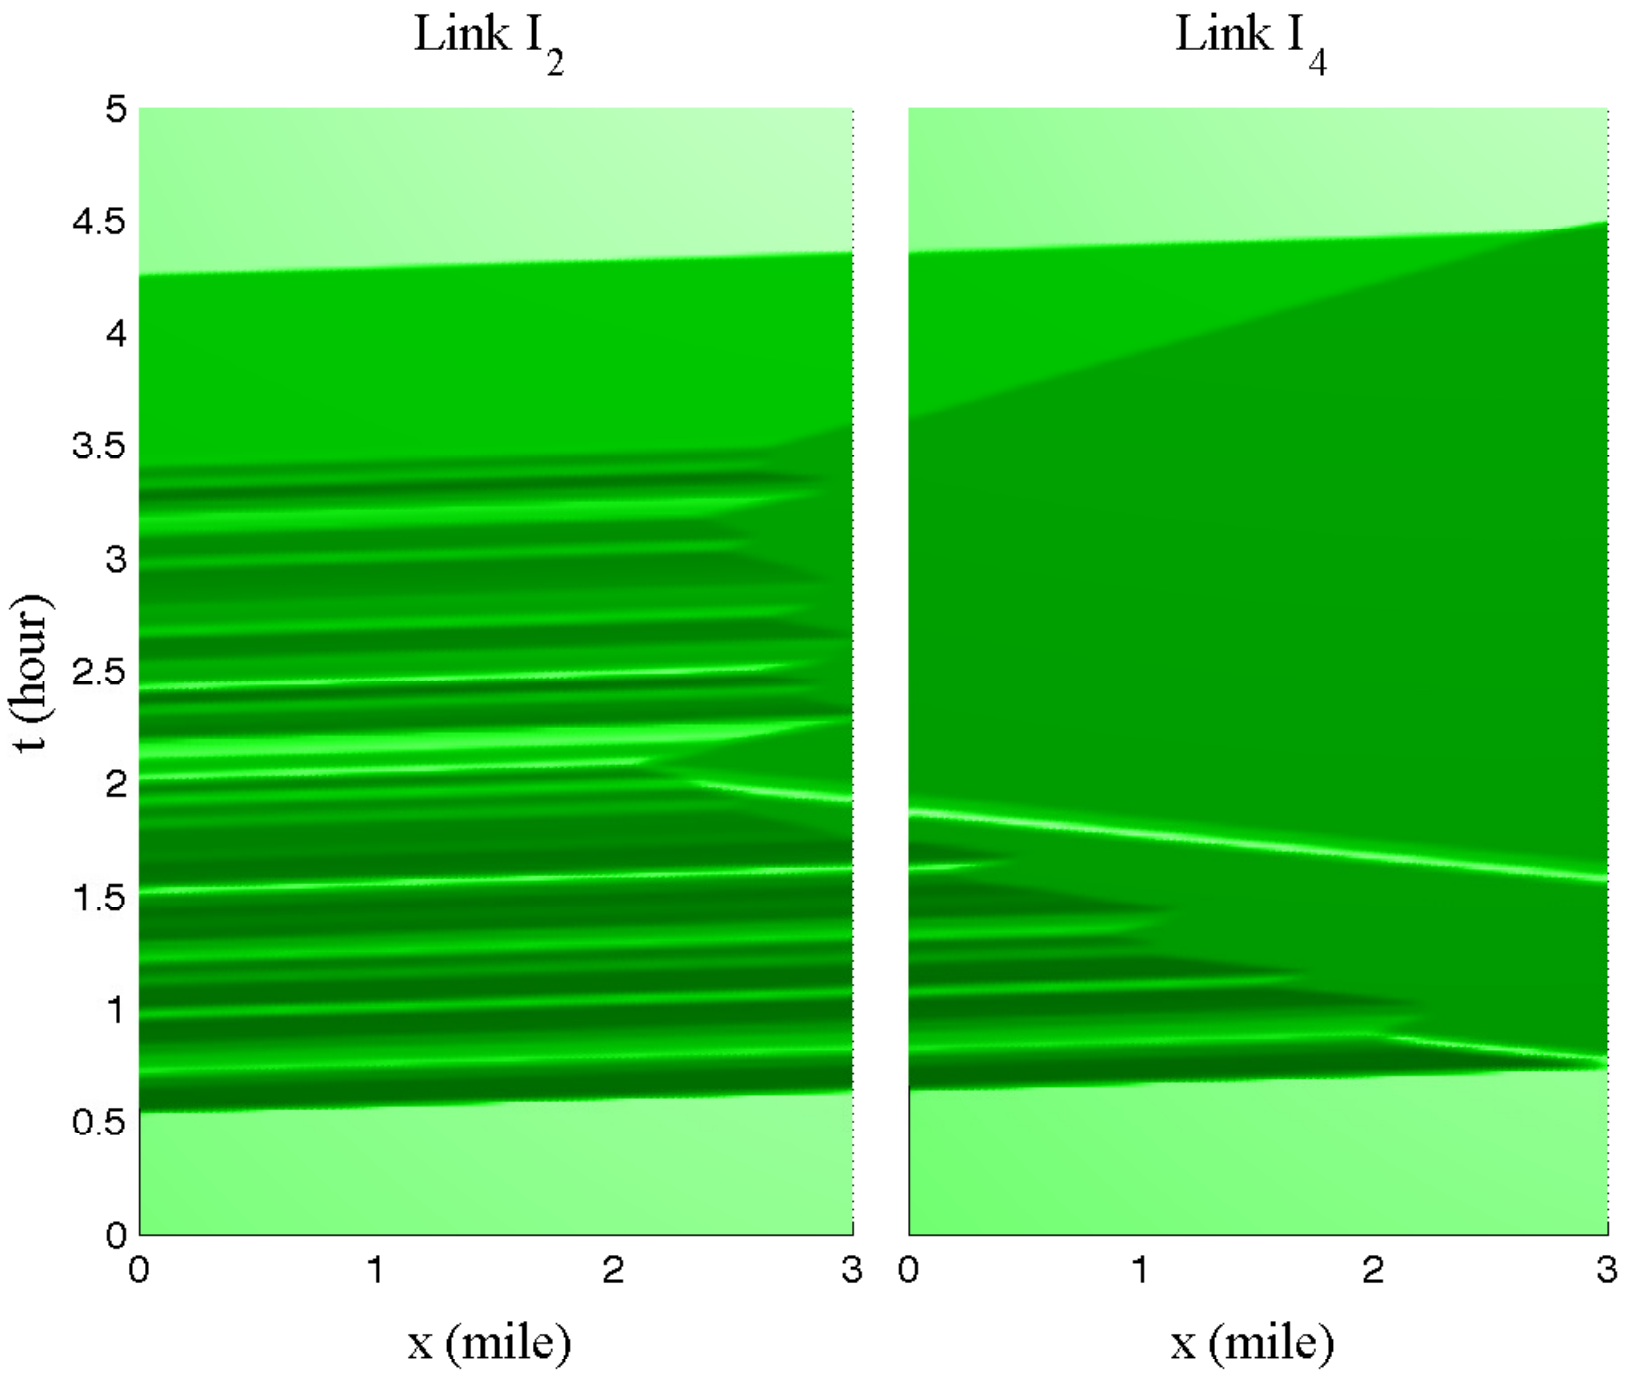

Figure 13: Moskowitz functions on links I_2 and I_4. The congestion on link I_4 spills onto link I_2.

As mentioned in Remark 4.6, such model poses new challenge in the estimation of norms of tangent vectors in the front tracking approximation. The DAE system (3.20)-(3.25) also needs to be extended to the O-D network.

References

[1] Aubin, J.P., Bayen, A.M., Saint-Pierre, P., 2008. Dirichlet problems for some Hamilton-Jacobi equations with inequality constraints. SIAM Journal on Control and Optimization 47(5), 2348-2380.

[2] Bardi, M., Capuzzo Dolcetta, I., 1997. Optimal Control and Viscosity Solutions of Hamilton-Jacobi-Bellman Equations, Birkhäuser.

[3] Bressan, A., 2000. *Hyperbolic Systems of Conservation Laws. The One Dimensional Cauchy Problem.* Oxford University Press.

[4] Bressan, A., Han, K., 2011. Optima and Equilibria for a model of traffic flow. SIAM J. Math. Anal 43 (5), 2384-2417.

[5] Bressan, A., Han, K., 2011. Nash Equilibria for a Model of Traffic Flow with Several Groups of Drivers. ESAIM: Control, Optimization and Calculus of Variations, DOI:10.1051/cocv/2011198.

[6] Bretti, G., Natalini, R., Piccoli, B., 2006. Numerical approximations of a traffic flow model on networks, Networks and Heterogeneous Media 1, 57-84.

[7] Chitour, Y., Piccoli, B., 2005. Traffic circles and timing of traffic lights for cars flow, Discrete Contin. Dynam. Systems Series B 3, 599-630.

[8] Claudel, C.G., Bayen, A.M., 2010. Lax-Hopf Based Incorporation of Internal Boundary Conditions Into Hamilton-Jacobi Equation. Part I: Theory. IEEE Transactions on Automatic Control 55 (5), 1142-1157.

[9] Claudel, C.G., Bayen, A.M., 2010. Lax-Hopf Based Incorporation of Internal Boundary Conditions Into Hamilton-Jacobi Equation. Part II: Computational methods. IEEE Transactions on Automatic Control 55 (5), 1158-1174.

[10] Coclite, G.M., Garavello, M., Piccoli, B., 2005. Traffic flow on a road network, SIAM J. Math. Anal. 36 (6), 1862-1886.

[11] Dafermos, C.M., 2000. *Hyperbolic conservation laws in continuum physics*. Grundlehren der Mathematischen Wissenschaften. 325. Berlin: Springer.

[12] Daganzo, C.F., 1994. The cell transmission model: A simple dynamic representation of highway traffic. Trans. Res. B 28B (4), 269-287.

[13] Daganzo, C.F., 1995. The cell transmission model, part II: network traffic. Trans. Res. B 29B(2), 79-93.

[14] Daganzo, C.F., 2005. A variational formulation of kinematic waves: basic theory and complex boundary conditions. Trans. Res. B 39, 187-196.

[15] Daganzo, C.F., 2006. On the variational theory of traffic flow: well-posedness, duality and application. Network and heterogeneous media 1 (4), 601-619.

[16] D'Apice, C., Piccoli, B., 2008. Vertex flow models for vehicular traffic on networks. Mathematical Models and Methods in Applied Schences 18, 1299-1315.

[17] Evans, L.C., 2010. Partial Differential Equations. Second edition. American Mathematical Society, Providence, RI.

[18] Friesz, T.L., Luque, F.J., Tobin, R.L., Wie, B.W., (1989). Dynamic network traffic assignment considered as a continuous time optimal control problem. Operations Research 6, 893-901.

[19] Friesz, T.L., Bernstein, D., Smith, T., Tobin, R., Wie, B., 1993. A variational inequality formulation of the dynamic network user equilibrium problem. Operations Research 41 (1), 80-91.

[20] Friesz, T.L., Kim, T., Kwon, C., Rigdon, M.A., 2010. Approximate network loading and dual-time-scale dynamic user equilibrium. Trans. Res. B 45, 176-207.

[21] Friesz, T.L., Han, K., Meimand, A., Neto, P., Yao, T., 2012. Dynamic user equilibrium based on a hydrodynamic model. Submitted to Trans. Res. Part B.

[22] Garavello, M., Piccoli, B., 2006. Traffic Flow on Networks. Conservation Laws Models. AIMS Series on Applied Mathematics, Springfield, Mo..

[23] Garavello, M., Piccoli, B., 2009. Conservation laws on complex networks. Ann. Inst. H. Poincar Anal. Non Linaire 26 (5), 1925-1951.

[24] Godunov, S.K., 1959. A finite difference method for the numerical computation of discontinuous solutions of the equations of fluid dynamics, Mat. Sb. 47, 271-290.

[25] Han, L., Ukkusuri, S., Doan, K., 2011. Complementarity formulation for the cell transmission model based dynamic user equilibrium with departure time choice, elastic demand and user heterogeneity. Trans. Res. B 45, 1749-1767.

[26] Herty, M., Klar, A., 2003. Modeling, simulation, and optimization of traffic flow networks, SIAM J. Sci. Comput. 25, 1066-1087.

[27] Holden, H., Risebro, N.H., 1995. A mathematical model of traffic flow on a network of unidirectional roads.

[28] Holden, H., Risebro, N.H., 2002. *Front Tracking for Hyperbolic Conservation Laws.* Springer.

[29] Jin, W.-L., 2010. Continuous kinematic wave models of merging traffic flow. Trans. Res. B 44, 1084-1103.

[30] Jin, W.-L., Zhang, H.M., 2003. On the distribution schemes for determining flows through a merge. Trans. Res. B 37 (6), 521-540.

[31] Kachani, S., Perakis, G., 2002. Fluid dynamics models and their application in transportation and pricing. Technical Report, Sloan School of Management, MIT.

[32] Lax, P.D., 1957. Hyperbolic systems of conservation laws II. Comm. Pure Appl. Math. 10, 537566.

[33] Lax, P.D., 1973. Hyperbolic systems of conservation laws and the mathematical theory of shock waves, SIAM.

[34] Lebacque, J., 1996. The Godunov scheme and what it means for first order traffic flow models. In: Proceedings of the 13th International Symposium on Transportation and Traffic Theory, 647-678.

[35] Lebacque, J., Khoshyaran, M., 1999. Modeling vehicular traffic flow on networks using macroscopic models, in Finite Volumes for Complex Applications II, 551-558, Hermes Sci. Publ., Paris, 1999.

[36] Lebacque, J., Khoshyaran, M., 2002. First order macroscopic traffic flow models for networks in the context of dynamic assignment, Transportation Planning State of the Art, M. Patriksson and K. A. P. M. Labbe, eds., Kluwer Academic Publushers, Norwell, MA.

[37] Le Floch, P., 1988. Explicit formula for scalar non-linear conservation laws with boundary condition, Math. Models Appl. Sci., 10, pp. 265287.

[38] LeVeque, R.J., 1992. *Numerical Methods for Conservation Laws.* Birkhäuser.

[39] Lighthill, M., Whitham, G., 1955. On kinematic waves. II. A theory of traffic flow on long crowded roads. Proceedings of the Royal Society of London: Series A 229, 317-345.

[40] Marigo, A., Piccoli, B., 2008. A fluid dynamic model for T-junctions. SIAM J. Math. Anal. 39 (6), 2016-2032.

[41] Moskowitz, K., 1965. Discussion of 'freeway level of service as influenced by volume and capacity characteristics' by D.R. Drew and C.J. Keese. Highway Research Record, 99, 43-44.

[42] Newell, G.F., 1993. A simplified theory of kinematic waves in highway traffic. Trans. Res. B, 27B(4), 281-303.

[43] Ni, D., Leonard, J., 2005. A simplified kinematic wave model at a merge bottleneck. Applied Mathematical Modeling 29(11), 1054-1072.

[44] Peeta, S., Ziliaskopoulos, A.K., 2001. Foundations of dynamic traffic assignement: the past, the present and the future. Networks and Spatial Economics 1, 233-265.

[45] Perakis, G., Roels, G., 2006. An analytical model for traffic delays and the dynamic user equilibrium problem. Operations Research 54 (6), 11511171.

[46] Ran, B., Boyce, D.E., 1996. A link-based variational inequality formulation of ideal dynamic user optimal route choice problem. Trans. Res. 4C (1), 1-12.

[47] Richards, P.I., 1956. Shockwaves on the highway. Operations Research 4, 42-51.

[48] Szeto, W.Y., 2003. Dynamic traffic assignment: formulations, properties, and extensions. Ph.D. Thesis, Hong Kong University of Science and Technology, Hong Kong.

[49] Szeto, W.Y., Lo, H.K., 2006. Dynamic traffic assignment: properties and extensions. Transportmetrica 2 (1), 31-52.

[50] Wie, B.W., Tobin, R.L., Carey, M., 2002. The existence, uniqueness and computation of an arc-based dynamic network user equilibrium formulation. Trans. Res. Part B 36, 897-918.

[51] Yperman, I., S. Logghe and L. Immers, 2005. The Link Transmission Model: An Efficient Implementation of the Kinematic Wave Theory in Traffic Networks, Advanced OR and AI Methods in Transportation, Proc. 10th EWGT Meeting and 16th Mini-EURO Conference, Poznan, Poland, 122-127, Publishing House of Poznan University of Technology.

[52] Zhang, H., 2001. Continuum flow models, traffic flow theory, a state-of-the-art report. Tech. Rep., Transportation Research Board, Original Text by Reinhart Kuhne and Panos Michalopoulos.